

Intelligent Drivesystems, Worldwide Services



EN

M7010

Motors with smooth surface

Smooth motors type HM
Smooth motors type HMT



NORD[®]
DRIVESYSTEMS

Contents

INTRODUCTION	A 2
NOMENCLATURE	A 3
OPTIONS	A 4
EXTENDED OPERATION RANGE AND INTERMITTENT OPERATION S3	A 6
MOTOR DATA AND DIMENSIONED DRAWINGS	B 2





Headquarters and Technology Centre

- in Bargteheide, close to Hamburg

Mechanical products

Gear units



Electrical products

Motors



Electronic products

Inverters, motor starters and distribution systems



Innovative drive solutions

- for more than 100 branches of industrial



Gear unit production



Motor production



Inverter production

7 state-of-the-art production plants

- produce gear units, motors and inverters also for complete drive solutions from a single source



The above map image is for information purpose and may not have been prepared or be suitable for legal purpose and we do not own any responsibility for correctness or authenticity of the same.

Subsidiaries and sales partners in 98 countries on 5 continents

- provide local stocks
- assembly and production centres
- technical support
- customer service



More than 4.900 employees throughout the world

- create customer oriented solutions

NORD smooth surface motors



NORD DRIVESYSTEMS builds motors both with and without brakes for the international market.

Our own motor production facilities guarantee that NORD is independent from supply bottlenecks, ensuring short delivery times.

This is a decisive benefit for our customers.

The use of NORD energy-saving three-phase motors with considerably higher efficiencies allows you to reduce operating costs.

This catalogue presents unventilated and ventilated NORD motors with smooth surfaces. Smooth surfaces are important, for example, where motors must be simply and thoroughly cleaned.

Advantages

- Smooth surfaces, especially suitable for applications in the food and beverage industry.
- A wide choice of motor sizes 71, 80, 90, 100 for the major applications.
- The motors are based on the NORD modular construction system and therefore offer maximum flexibility.

Features

- Aluminium housing (smooth surface).
- Easy to clean thanks to smooth surfaces (Washdown = water always runs off).
- Perfectly suited for NORD smooth surface gear units as complete gearmotor assemblies.






Motor power labelling

Shaft height 71, 80, 90, 100				
Power code		S, L, T		
Efficiency class		H/P = premium	T 1,3,5 = IE4	IE3 unventilated IE2 ventilated
Number of poles		4-pole		
Motor type		Labelling only for motors with special characteristics HM Smooth motors		
Variant		unventilated (Standard) L/H ventilated		
Option		⇒ A4-5		


Example

100	L	H	/	4	HM	TF	TF = Shaft height 100 Power code L Efficiency class H No. of poles 4 Motor type HM Option TF		
-----	---	---	---	---	----	----	--	--	--

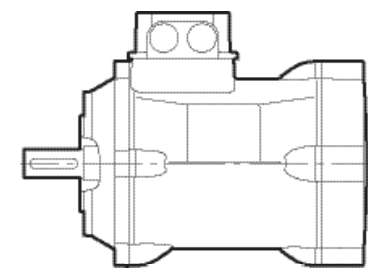

Standard

Smooth motor, unventilated

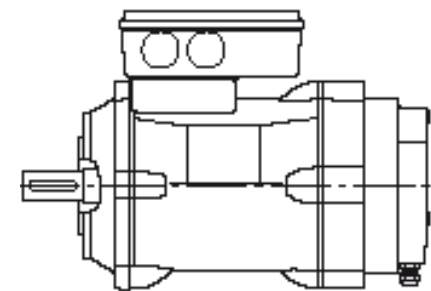

Standard

Smooth motor with brake, unventilated



NORD smooth surface motors always comply with protection class IP66 and can be combined with every gear unit type.

The tables on pages ⇒ A6-A7 help you dimensioning your application, especially in intermittent operation.

Options



		Smooth motor						
		unventilated		unventilated		ventilated	unventilated	
		S / L				T		
		Standard HM		Standard HM		HM ⁵⁾	PMSM HM	PMSM HMT
Abbreviations	Meaning							
IP66 BRE ...+ ¹⁾	Brake / braking torque + sub-option			x ⁵⁾		x	x	x
IR	Current relay			x ⁵⁾		x		
FHL	Lockable manual release			-		x		
HL	Manual brake release			x ⁵⁾		x		
MIK	Micro switch			x ⁵⁾		x		
BSH	Standstill heater / Brake			x ⁵⁾		x		
NRB 1	Noise-reduced brake			-		-		
NRB 2	Noise-reduced brake			x ⁵⁾		x		
IP69K	Protection class	x		x		x	x	x
TF	Thermistor, PTC resistor	x		x		x	x	x
TW	Thermostat, bimetallic switch	x		x		x	x	x
SH ³⁾	Standstill heating	x		x		x	x	x
WE +	2. Shaft end			-		x		
HR	Hand wheel			-		x		
RD	Protective shield			-		x		
RDT	Protective shield, textile fan cowl			-		x		
RDD	Double fan-cowl			-		x		
KB	closeable condensation hole	x		x		x	x	x
KKV	Terminal box, encapsulated	x		x		x	x	x
MS	Plug-on motor coupling			x		x		
F	External fan			-		x		
IG1 (IG11, 12)	Pulsed incremental encoder 1024			-		x		
IG2 (IG21, 22)	Pulsed incremental encoder 2048			-		x		
IG4 (IG41, 42)	Pulsed incremental encoder 4096			-		x		
IG.K	Encoder with terminal box			-		x		

¹⁾ it is quick-switching rectifier to use

²⁾ integrated brake ⇒ B7

³⁾ Brake terminal box

⁵⁾ not for size 71



Brake - attached brake IP66 (BRE)

By default, a closed brake is directly screwed to the B-bearing cover of the motor;

E.g.: 80 LH/4 HM BRE5

Current measuring relay (IR)

Generator operation is excluded after the motor was switched off;

E.g.: 80 LH/4 HM BRE5 IR

Micro switch (MIK)

Brake with electronic release monitor;

E.g.: 80 LH/4 HM BRE5 MIK

Standstill heater / brake (BSH)

To prevent the condensation of moisture and freezing of the brake, a the brake with standstill heater can be implemented;

E.g.: 80 LH/4 HM BSH

IP69K

Protection against the ingress of dust (IP6_) and

Protection against the penetration of water, even with high pressure or steam jet cleaning (IP_9K)

Thermal motor protection

NORD can supply two heat protection components.

- TF = Thermistor temperature sensor (series)
- TW = Bimetal temperature sensor (for an extra charge)

These are used to directly monitor the temperature of the windings with full utilisation of the motor power;

E.g.: 80 LH/4 HM TF

Standstill heating (SH)

A standstill heater must be used in case of severe temperature fluctuations, high humidity or extreme climatic conditions. This prevents condensation inside the motor;

E.g.: 100 LH/4 HM SH

2. shaft end (WE)

Motors with a second shaft end on the B side;

E.g.: 100 LH/4 HM L/H WE

Handwheel (HR)

Motors with a handwheel mounted on the rear shaft end of the shaft;

E.g.: 90 SH/4 HM L/H HR

Protective cover (RD)

Protection against rain and entry of foreign bodies for vertical installation with the shaft pointing downwards;

E.g.: 100 LH/4 HM L/H RD (⇒ B9, B11)

Protective cover, textile fan cowl (RDT)

These motors have a fan cowl which is specially designed for use in the field of textiles. The lack of a normal ventilation grille prevents the build-up of flakes and fluff, which could impair the cooling of the motor;

E.g.: 80 LH/4 HM L/H RDT (⇒ B9, B11)

Double fan cowl (RDD)

Protection against rain and snow and entry of foreign bodies for vertical installation with the shaft pointing downwards. Suitable for water jets from all directions;

E.g.: 90 SH/4 HM L/H RDD (⇒ B9, B11)

Condensation drain hole (KB)

Depending on installation position, condensation drainage holes are drilled at the lowest position of the A or B bearing plate. These are closed with hex screws.

⚠ The version must be stated!

E.g.: 80 LH/4 HM KB

Encapsulated terminal box (KKV)

Terminal box base encapsulated in direction of interior;

E.g.: 80 LH/4 HM KKV

Motor plug connectors (MS)

Normal version

Terminal box at I, plug at II (to B-side, plug at I + III possible)

The plug connector is mounted on the side of the terminal box. Housings with 2-clamp transverse locking are used. At the motor, there is a 10-pole pin version;

E.g.: 80 LH/4 HM MS

External fan (F)

Motor with separately controlled fan;

E.g.: 90 SH/4 HM F

Encoders

Incremental encoder (IG)

Incremental encoders with various pulse numbers and interfaces are available. With "unventilated" motor variants, the encoder is protected underneath an aluminium cover.

With the "ventilated" variants, the encoder is mounted under the fan cover.

IG1K, IG2K or IG4K

With ventilated motors, an alternative connection in a separate terminal box is possible with the options IG1K, IG2K or IG4K (extra charge).

Quick-switching rectifier for installation in control cabinet



Extended operation range and intermittent operation S3

In the S3 mode, the motors are not subject to the efficiency classification. The following data can be used for motor planning. The breakdown torque is always higher than the 1.6-fold operating torque. The maximum utilisation of the motors is in accordance with thermal class 155 (F).

The heating of unventilated motors greatly depends on the installation conditions. The maximum surface temperature is only insignificantly below the temperature of the windings.

400 V / 50 Hz 4 - pole													
unventilated													
		S1			S3-60%			S3-40%			S3-25%		
Type		P _N [kW]	I [A]	n [1/min]	P [kW]	I [A]	n [1/min]	P [kW]	I [A]	n [1/min]	P [kW]	I [A]	n [1/min]
80	LH/4	0,37	0,98	1425	0,5	1,2	1390	0,63	1,5	1340	0,7	1,67	1325
90	SH/4	0,55	1,27	1435	0,75	1,61	1405	0,9	1,9	1385	1,2	2,66	1305
100	SH/4	0,75	1,65	1450	1,1	2,25	1420	1,35	2,75	1395	1,5	3,0	1390
100	LH/4	1,1	2,4	1445	1,5	3,05	1425	1,8	3,6	1410	2,2	4,4	1380

460 V / 60 Hz 4 - pole													
unventilated													
		S1			S3-60%			S3-40%			S3-25%		
Type		P _N	I	n	P	I	n	P	I	n	P	I	n
		[kW]	[A]	[1/min]	[kW]	[A]	[1/min]	[kW]	[A]	[1/min]	[kW]	[A]	[1/min]
80	LH/4	0,37	0,89	1735	0,5	1,05	1710	0,63	1,26	1680	0,7	1,38	1670
90	SH/4	0,55	1,14	1740	0,75	1,4	1720	0,9	1,62	1705	1,2	2,13	1665
100	SH/4	0,75	1,47	1755	1,1	1,95	1735	1,35	2,32	1715	1,5	2,55	1710
100	LH/4	1,1	2,14	1755	1,5	2,65	1735	1,8	3,1	1725	2,2	3,7	1710

Motors with increased power are electrically and mechanically modified compared with the energy-efficient motors.

400 V / 50 Hz 4 - pole													
unventilated / Increased power													
		S1			S3-60%			S3-40%			S3-25%		
Type		P _N	I	n	P	I	n	P	I	n	P	I	n
		[kW]	[A]	[1/min]	[kW]	[A]	[1/min]	[kW]	[A]	[1/min]	[kW]	[A]	[1/min]
80	L/4	0,47	1,25	1420	0,6	1,46	1395	0,75	1,76	1360	0,9	2,15	1310
90	S/4	0,67	1,58	1435	0,9	1,94	1410	1,1	2,3	1390	1,4	3,0	1335
100	S/4	1,0	2,2	1445	1,3	2,67	1425	1,5	3,0	1415	1,7	3,4	1405
100	L/4	1,3	2,95	1450	1,75	3,62	1430	2,1	4,22	1415	2,5	5,0	1395

460 V / 60 Hz 4 - pole													
unventilated / Increased power													
		S1			S3-60%			S3-40%			S3-25%		
Type		P _N	I	n	P	I	n	P	I	n	P	I	n
		[kW]	[A]	[1/min]	[kW]	[A]	[1/min]	[kW]	[A]	[1/min]	[kW]	[A]	[1/min]
80	L/4	0,53	1,2	1720	0,7	1,43	1690	0,85	1,68	1665	1,0	1,97	1630
90	S/4	0,77	1,53	1735	1,0	1,84	1715	1,25	2,22	1690	1,6	2,86	1640
100	S/4	1,15	2,13	1740	1,5	2,62	1725	1,8	3,08	1705	2,05	3,48	1695
100	L/4	1,45	2,8	1750	2,0	3,5	1725	2,4	4,1	1710	2,9	4,9	1690



400 V / 50 Hz
4 - pole

ventilated

				S1				S3-60%			S3-40%			S3-25%		
Type				P _N [kW]	P _{S1max} [kW]	I [A]	n [1/min]	P [kW]	I [A]	n [1/min]	P [kW]	I [A]	n [1/min]	P [kW]	I [A]	n [1/min]
80	LH/4	HM	L/H	0,75	1,0	2,4	1360	1,1	2,63	1340	1,2	2,9	1310	1,3	3,17	1285
90	SH/4	HM	L/H	1,1	1,5	3,28	1380	1,65	3,6	1365	1,8	3,93	1345	2,0	4,42	1315
100	SH/4	HM	L/H	1,5	2,15	4,36	1400	2,35	4,77	1390	2,55	5,21	1375	2,85	5,94	1355
100	LH/4	HM	L/H	2,2	2,75	5,65	1415	3,0	6,11	1405	3,3	6,7	1390	3,75	7,67	1370

460 V / 60 Hz
4 - pole

ventilated

				S1				S3-60%			S3-40%			S3-25%		
Type				P _N [kW]	P _{S1max} [kW]	I [A]	n [1/min]	P [kW]	I [A]	n [1/min]	P [kW]	I [A]	n [1/min]	P [kW]	I [A]	n [1/min]
				[kW]	[kW]	[A]	[1/min]	[kW]	[A]	[1/min]	[kW]	[A]	[1/min]	[kW]	[A]	[1/min]
80	LH/4	HM	L/H	0,75	1,25	2,46	1640	1,35	2,67	1620	1,45	2,89	1600	1,55	3,11	1585
90	SH/4	HM	L/H	1,1	1,85	3,37	1665	2,0	3,63	1650	2,15	3,92	1635	2,35	4,31	1620
100	SH/4	HM	L/H	1,5	2,55	4,38	1695	2,8	4,82	1680	3,0	5,18	1675	3,4	6,0	1645
100	LH/4	HM	L/H	2,2	3,3	5,68	1705	3,65	6,25	1695	3,95	6,75	1685	4,45	7,66	1665

Notes






MOTOR DATA

Standard HM/HMT unbelüftet															
1500 1/min 50 Hz															
230/400 V / 400/690 V 4 - polig															
Type	S1	P _N	I _N	I _Δ	I _Δ	cos φ	η	M _N	M _Δ	M _Δ	M _Δ	M _Δ	I _Δ	J	
		[kW]	[A]	[A]	[A]		[%]	[Nm]	[Nm]	[Nm]	[Nm]	[Nm]	[A]	[kgm ²]	
80 L194 190	0.47	1.380	2.0 / 1.15	1.550	0.74	77.7	79.0	3.21	2.5	2.6	5.0	0.0019			
90 L204 190	0.67	1.600	2.40 / 1.35	1.820	0.84	79.0	81.0	4.08	2.6	2.7	5.6	0.0024			
100 L214 190	1.0	1.420	2.40 / 1.35	1.820	0.84	81.0	83.0	4.7	2.4	2.6	6.2	0.006			
100 L214 190	1.3	1.430	2.40 / 1.35	1.820	0.84	84.2	86.0	5.4	3.0	3.5	7.3	0.0075			
1800 1/min 60 Hz															
265/460 V / 460 VΔ 4 - polig															
Type	S1	P _N	I _N	I _Δ	I _Δ	cos φ	η	M _N	M _Δ	M _Δ	M _Δ	M _Δ	I _Δ	J	
		[kW]	[A]	[A]	[A]		[%]	[Nm]	[Nm]	[Nm]	[Nm]	[Nm]	[A]	[kgm ²]	
80 L194 190	0.53	1.700	2.4 / 1.3	1.1	0.74	79.0	81.0	4.08	2.57	2.6	5.4	0.0019			
90 L204 190	0.77	1.700	2.4 / 1.3	1.1	0.84	80.0	83.1	4.33	2.4	2.6	6.0	0.0024			

DIMENSIONED DRAWINGS OF MOTORS

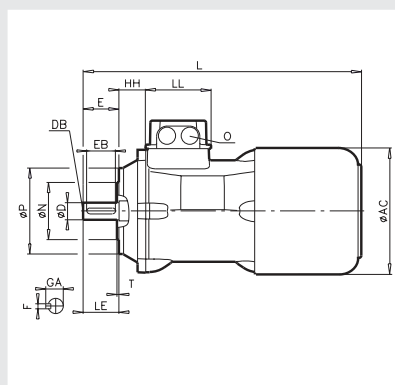

Standard HM/HMT unventilated



1500 1/min 50 Hz			230/400 V / 400/690 V 4 - polig									IE3				
			S1													
Type			P _N	η _N	I _N	I _N	cos	η			M _N	M _A /M _N	M _K /M _N	I _A /I _N	J	
			S1		230/400 V	400/690 V	φ	1/2xP _N	3/4xP _N	4/4xP _N						
			[kW]	[1/min]	[A]	[A]		[%]	[%]	[%]	[Nm]				[kgm²]	[kg]
71	SP/4	HM	0,12	1420	0,66/0,38	0,38/0,22	0,66	60,1	66,8	69,2	0,81	3,22	3,17	4,80	0,00072	5,27
71	MP/4	HM	0,18	1400	0,95/0,55	0,55/0,32	0,70	63,5	68,9	70,0	1,22	3,04	2,98	4,70	0,00086	5,96
71	LP/4	HM	0,25	1400	1,15/0,67	0,67/0,38	0,72	70,1	73,6	73,7	1,69	3,04	2,89	4,80	0,0011	6,85
80	LH/4	HM	0,37	1425	1,70/0,98	0,98/0,57	0,70	73,9	78,2	79,3	2,48	3,50	3,50	5,50	0,0019	10,20
90	SH/4	HM	0,55	1435	2,20/1,27	1,27/0,73	0,78	76,2	80,1	81,2	3,66	3,60	4,10	7,20	0,0034	15,10
100	SH/4	HM	0,75	1450	2,86/1,65	1,65/0,95	0,80	76,9	81,0	82,5	4,94	3,50	4,10	7,70	0,0060	21,00
100	LH/4	HM	1,10	1445	4,16/2,40	2,40/1,39	0,78	79,5	83,0	84,1	7,25	3,90	4,30	7,90	0,0075	25,20

1800 1/min 60 Hz			265/460 V / 460 VΔ 4 - polig									IE3				
			S1													
Type			P _N S1 [kW]	η _N [1/min]	I _N 265/460 V [A]	I _N 460 VΔ [A]	cos φ	η			M _N [Nm]	M _A /M _N	M _K /M _N	I _A /I _N	J [kgm²]	 [kg]
							1/2xP _N [%]	3/4xP _N [%]	4/4xP _N [%]							
71	SP/4	HM	0,12	1730	0,59/0,34	0,34	0,61	59,2	66,4	69,5	0,66	4,00	4,03	5,70	0,00072	5,27
71	MP/4	HM	0,18	1720	0,85/0,49	0,49	0,65	63,3	70,1	72,3	1,00	3,86	3,80	5,60	0,00086	5,96
71	LP/4	HM	0,25	1720	1,03/0,60	0,60	0,69	70,1	74,8	76,2	1,38	3,76	3,70	6,00	0,0011	6,85
80	LH/4	HM	0,37	1735	1,54/0,89	0,89	0,68	69,8	75,6	78,2	2,03	4,20	4,30	6,50	0,0019	10,20
90	SH/4	HM	0,55	1740	1,97/1,14	1,14	0,75	73,7	78,9	81,1	3,01	4,30	4,90	8,20	0,0034	15,10
100	SH/4	HM	0,75	1755	2,55/1,47	1,47	0,78	79,9	83,9	85,5	4,08	4,20	4,90	8,80	0,0060	21,00
100	LH/4	HM	1,10	1755	3,71/2,10	2,10	0,76	81,4	85,1	86,5	6,00	4,60	5,10	9,10	0,0075	25,20

Type plate




Type SK 80 LH/4 HM TF

3 ~ Mot. No. 2009471123-100 12345678

Th.Cl. 155(F) IP 66 S1 IEC 60034 (H)

50 Hz 230/400 VΔ/Y 60 Hz 265/460 VΔ/Y

1,7/0,98 A 0,37 kW 1,54/0,89 A 0,37 kW

COS φ 0,7 1425 min⁻¹ COS φ 0,68 1735 min⁻¹

V V

A A

IE3 = 79,3 % IE3 = 78,2 %

Getriebefabrik NORD GmbH & Co. KG, 22939 Bargteheide / GERMANY www.nord.com



1500 1/min
50 Hz

230/400 V / 400/690 V
4 - polig

			S1													
Type			P _N	η _N	I _N	I _N	cos	η			M _N	M _A /M _N	M _K /M _N	I _A /I _N	J	
			S1		230/400 V	400/690 V	φ	1/2xP _N	3/4xP _N	4/4xP _N						
			[kW]	[1/min]	[A]	[A]		[%]	[%]	[%]	[Nm]				[kgm²]	[kg]
80	L/4	HM	0,47	1420	2,17/1,25	1,25/0,72	0,68	70,9	75,7	77,3	3,15	3,6	3,6	5,4	0,0019	10,2
90	S/4	HM	0,67	1435	2,74/1,58	1,58/0,91	0,74	72,4	77,3	79,1	4,45	3,6	4,2	7,2	0,0034	15,1
100	S/4	HM	1,00	1445	3,80/2,20	2,20/1,27	0,79	75,3	79,5	81,0	6,61	3,3	3,9	7,3	0,006	21,0
100	L/4	HM	1,30	1450	5,00/2,95	2,95/1,67	0,75	75,9	80,4	82,1	8,56	4,1	4,5	7,9	0,0075	25,2

1800 1/min
60 Hz

265/460 V / 460 VΔ
4 - polig

			S1													
Type			P _N	η _N	I _N	I _N	cos	η			M _N	M _A /M _N	M _K /M _N	I _A /I _N	J	
			S1		265/460 V	460 VΔ	φ	1/2xP _N	3/4xP _N	4/4xP _N						
			[kW]	[1/min]	[A]	[A]		[%]	[%]	[%]	[Nm]				[kgm²]	[kg]
80	L/4	HM	0,53	1720	2,08/1,20	1,2	0,69	75,8	80	81,3	2,94	3,6	3,7	5,9	0,0019	10,2
90	S/4	HM	0,77	1735	2,65/1,53	1,53	0,76	76,8	81,0	82,5	4,23	3,8	4,3	7,6	0,0034	15,1
100	S/4	HM	1,15	1740	3,69/2,13	2,13	0,8	79,0	82,8	84,0	6,3	3,4	4,0	7,6	0,006	21,0
100	L/4	HM	1,45	1750	4,85/2,80	2,8	0,75	77,9	82,2	84,0	7,92	4,3	4,7	8,6	0,0075	25,2

Type plate




Type SK 80 L / 4 HM TF

3 ~ Mot.

No. 2009471123-100

12345678

Th.Cl. 155(F)

IP 66

S1

IEC 60034 (H)

50 Hz

230/400 VΔ/Y

60 Hz

265/460 VΔ/Y

2,17/1,25 A

0,47 kW

2,08/1,2 A

0,53 kW

COS φ0,68

1420 min⁻¹

COS φ0,69

1720 min⁻¹

V

V

A

A

Getriebebau NORD GmbH & Co. KG, 22939 Bargteheide / GERMANY

www.nord.com

HM ventilated



1500 1/min 50 Hz				230/400 V & 400/690 V 4 - polig									IE2				
				S1													
Type				P _N	n _N	I _N		cos	η			M _N	M _A /M _N	M _K /M _N	I _A /I _N	J	
				[kW]	[1/min]	230/400 V [A]	400/690 V [A]	φ	1/2xP _N [%]	3/4xP _N [%]	4/4xP _N [%]	[Nm]				[kgm²]	[kg]
80	LH/4	HM	L/H	0,75	1420	3,23/1,87	1,87/1,08	0,7	80,4	82,0	81,6	5,05	3,15	3,3	5,3	0,0019	10,2
90	SH/4	HM	L/H	1,1	1435	4,40/2,54	2,54/1,47	0,76	81,5	83,8	83,6	7,4	3,35	3,7	6,4	0,0034	15,1
100	SH/4	HM	L/H	1,5	1445	5,56/3,21	3,21/1,85	0,8	84,9	86,3	85,8	10,1	3,05	3,65	7,2	0,006	21,0
100	LH/4	HM	L/H	2,2	1440	8,33/4,81	4,81/2,78	0,8	85,4	86,4	85,8	15,2	3,2	3,7	7,1	0,0075	25,2

1800 1/min				265/460 V & 460 V D									IE2				
60 Hz				4 - polig													
				S1													
Type				P _N	n _N	I _N		cos	η			M _N	M _A /M _N	M _K /M _N	I _A /I _N	J	
				[kW]	[1/min]	265/460 V	460 V	φ	1/2xP _N	3/4xP _N	4/4xP _N	[Nm]				[kgm²]	[kg]
80	LH/4	HM	L/H	0,75	1735	2,89/1,67	1,67	0,67	80,1	83,2	83,8	4,13	3,7	4,0	6,4	0,0019	10,2
90	SH/4	HM	L/H	1,1	1745	3,91/2,26	2,26	0,73	81,5	84,3	85,1	6,1	3,9	4,6	7,8	0,0034	15,1
100	SH/4	HM	L/H	1,5	1755	4,88/2,82	2,82	0,78	83,7	86,4	86,9	8,28	3,4	4,45	8,6	0,006	21,0
100	LH/4	HM	L/H	2,2	1750	7,10/4,10	4,10	0,77	85,4	87,6	87,8	12,5	3,7	4,5	8,7	0,0075	25,2

Type plate

					
Type SK 80 LH/4 HM L/H TF					
3 ~ Mot.		No. 2009471123-100		12345678	
Th.Cl. 155(F)		IP 66		S1 IEC 60034 (H)	
50 Hz		230/400 VΔ/Y		60 Hz 265/460 VΔ/Y	
3,23/1,87 A		0,75 kW		2,89/1,67 A 0,75 kW	
COS φ 0,7		1420 min ⁻¹		COS φ 0,67 1735 min ⁻¹	
V			V		
A			A		
IE2 = 81,6 %			IE2 = 83,8 %		
					
					
Getriebefabrik NORD GmbH & Co. KG, 22939 Bargteheide / GERMANY 					
www.nord.com					

2100 1/min 70 Hz			400 V 4 - polig									IE4
			S1									
Type			M _N	P _N	η _N	I _N	η	M _{max} *	kT	kE	J	
			[Nm]	[kW]	[1/min]	400 V [A]	4/4xP _N [%]	[Nm]	[Nm/A]	[mV/rpm]	[kgm²]	[kg]
80	T1/4	HM	3,41	0,75	2100	1,46	91,2	13,5	2,30	154,00	0,0011	7,8
90	T3/4	HM	5	1,1	2100	2,08	93,0	28,3	2,40	156,00	0,0024	11,6
100	T5/4	HM	10	2,2	2100	4,16	91,2	53,5	2,40	165,00	0,0060	20,2

* kurzzeitig


Type plate

   											
Type SK 90 T3 / 4 HM TF											
3 ~ Mot.		No.									
Th.Cl. 155(F)		IP66		S1		IEC 60034 (H)					
$V \Delta / Y$	Hz	kW	HP	A		$\cos \varphi$	min ⁻¹	%	IE4		
195/338	70	1,1	1,5	3,61/2,08		0,97	2100	92,7			
Ur 400 - 460 V		VPWM		CT	SF	1,0	Isf 3,61/2,08 A				
KE 90/156 mV/min		Kt 1,4/2,4 Nm/A		Imax 20,4/11,8		A					
Rstr 2,45 Ω		Ld 27,5 mH		Lq 61,0 mH							
Getriebefabrik NORD GmbH & Co. KG, 22939 Bargteheide / GERMANY 											

B14 unventilated + PMSM HM





Standard

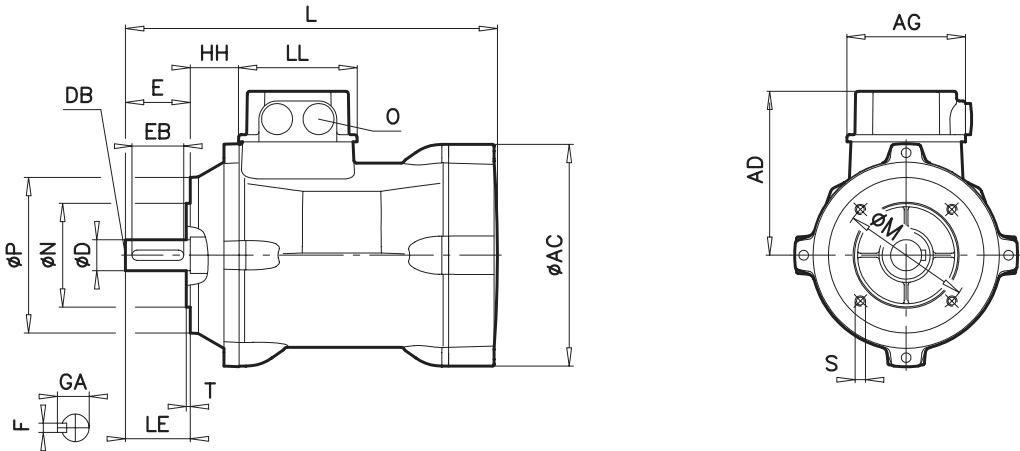

Type	HM / HMT unbelüftet																			
		[mm]																		
		M	N	P	S	T	AC	AD	AG	HH	L	O	LE	LL	D	DB	E	EB	F	GA
71	SP / MP / LP	85	70	105	M6x12	2,0	136	109	75	32	207	M16x1,5	30	75	14	M5	30	20	5	16
80	L / LH / T1	100	80	120	M6x12	3,0	154	123,5	92	34	243	M20x1,5	40	92	19	M6	40	32	6	21,5
90	S / SH / T3	115	95	140	M8x15	3,0	171	128,5	92	37	288	M20x1,5	50	92	24	M8	50	40	8	27
100	S / L / SH / LH / T5	130	110	160	M8x16	3,5	192	139,5	92	43	324	M20x1,5	60	92	28	M10	60	50	8	31


IM B14

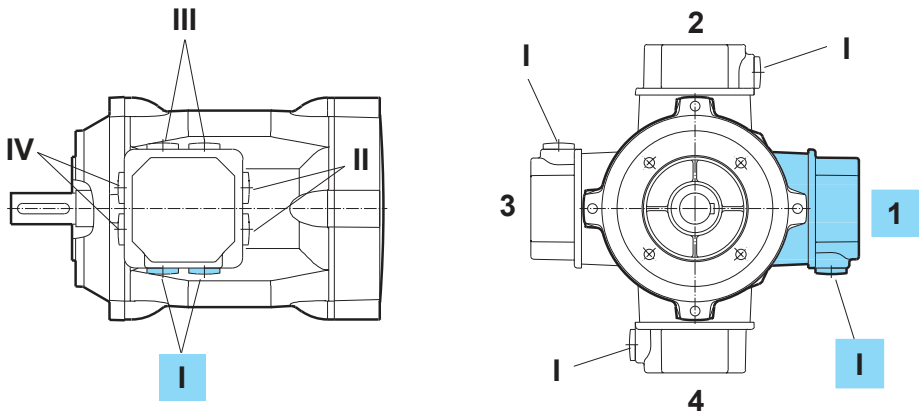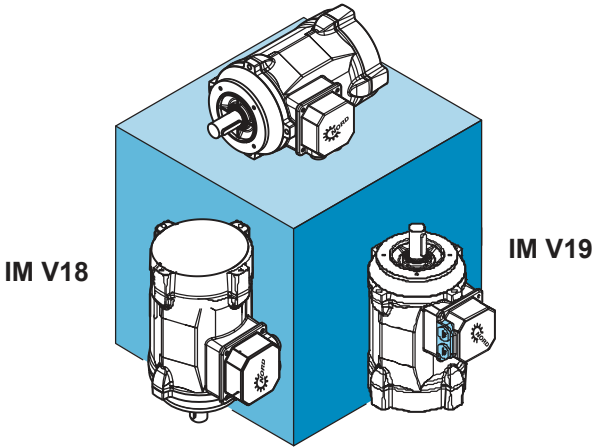




B14-BRE unventilated

Standard

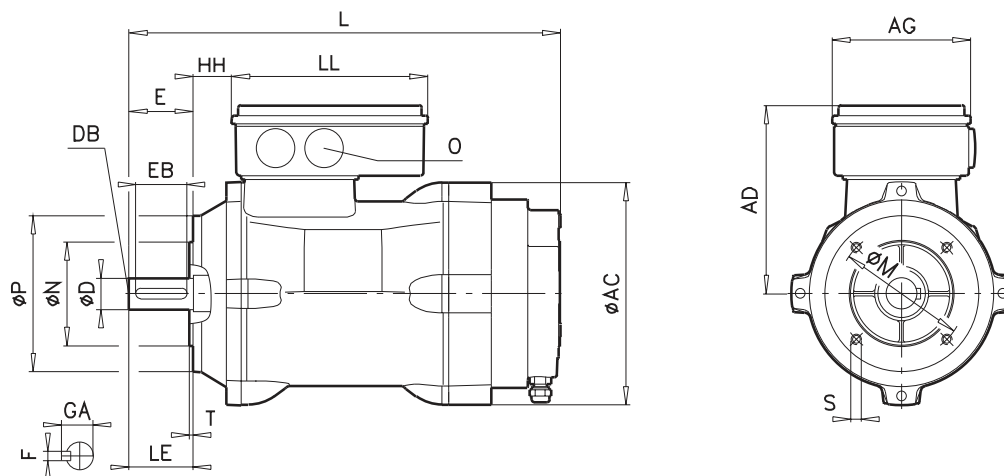


Type		HM unbelüftet	BRE [Nm]																		
				M	N	P	S	T	AC	AD	AG	HH	L	O	LE	LL	D	DB	E	EB	F
80	LH	5 10	100	80	120	M6x12	3,0	154	135	108	26	281 286	M25x1,5	40	153	19	M6	40	32	6	21,5
90	SH	10 20	115	95	140	M8x15	3,0	171	145	108	30	330 335	M25x1,5	50	153	24	M8	50	40	8	27
100	SH/LH	10 20	130	110	160	M8x16	3,5	192	167	108	36	367 372	M32x1,5	60	153	28	M10	60	50	8	31

Integrated brake


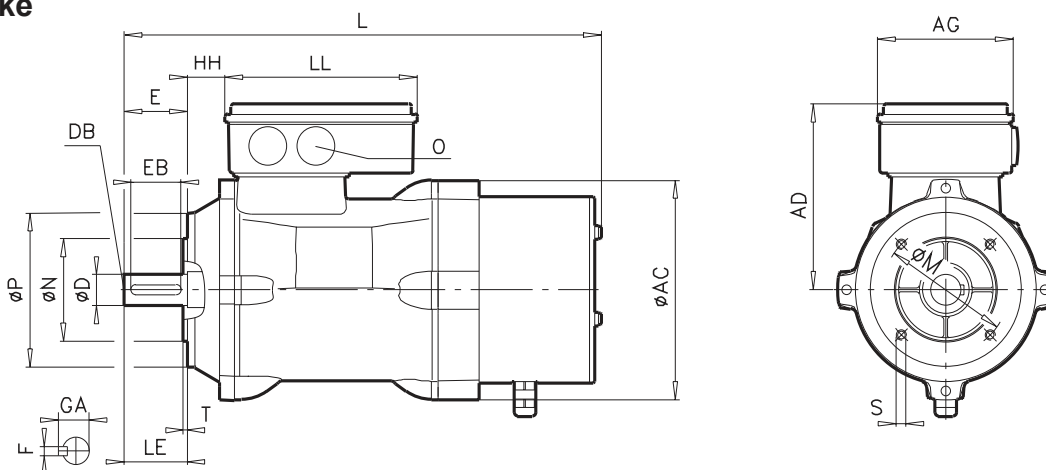


Type																									
HMT unbelüftet		BRE [Nm]																							
			M	N	P	S	T	AC	AD	AG	HH	L	O	LE	LL	D	DB	E	EB	F	GA				
80	LH	5 10	100	80	120	M6x12	3,0	154	135	108	26	333	M25x1,5	40	153	19	M6	40	32	6	21,5				
90	SH	10 20	115	95	140	M8x15	3,0	171	145	108	30	378	M25x1,5	50	153	24	M8	50	40	8	27				
100	SH/LH	10 20	130	110	160	M8x16	3,5	192	167	108	36	415	M32x1,5	60	153	28	M10	60	50	8	31				

B14 ventilated

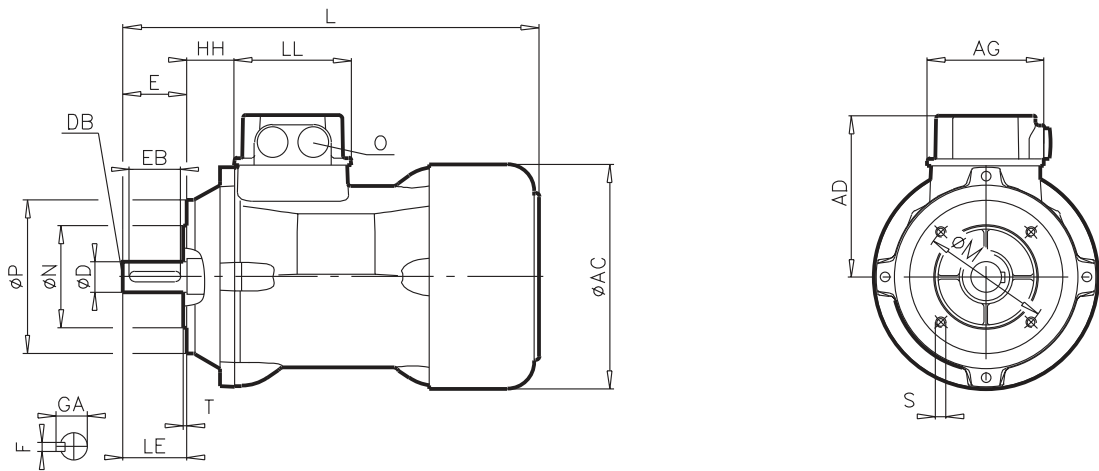

Type
HM
belüftet L/H




		M	N	P	S	T	AC	AD	AG	HH	L	LE	LL	...
80	LH	100	80	120	M6 x 12	3,0	156	117	92	26	276	40	114	
90	SH	115	95	140	M8 x 15	3,0	176	127	92	30	326	50	114	
100	SH/LH	130	110	160	M8 x 16	3,5	194	135	92	36	366	60	114	

IM B14





IM V18

IM V19


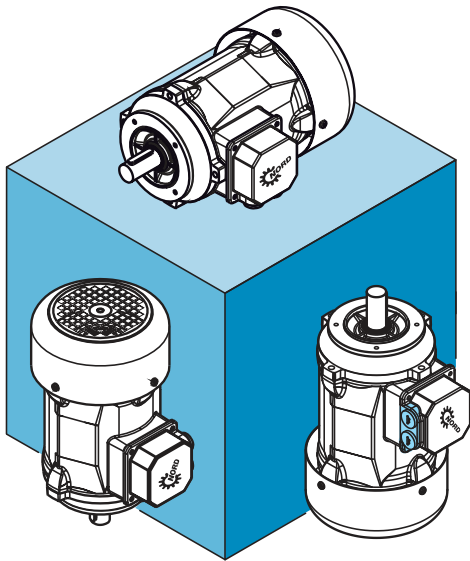






B14 ventilated

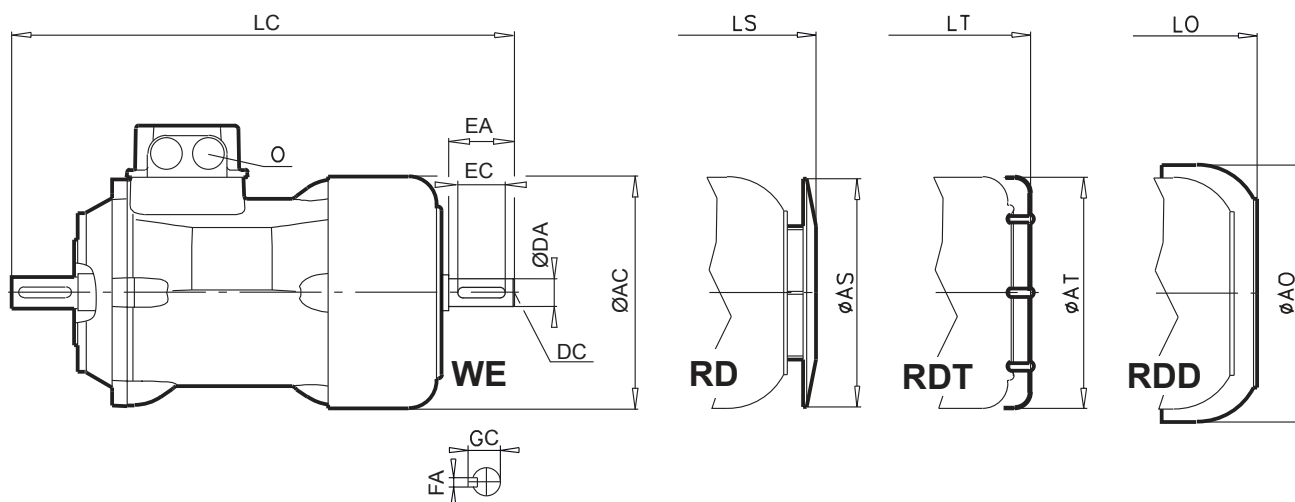



LC	AS	AT	AO	LS	LT	LO	O	D	DB	E	EB	F	GA	DA	DC	EA	EC	FA	GC
309	156	156	176	291	296	302	M20 x 1,5	19	M6	40	32	6	21,5	14	M5	30	20	5	16,0
373	176	176	194	341	345	357	M20 x 1,5	24	M8	50	40	8	27,0	14	M5	30	20	5	16,0
422	194	194	218	381	388	394	M20 x 1,5	28	M10	60	50	8	31,0	24	M8	50	40	8	27,0

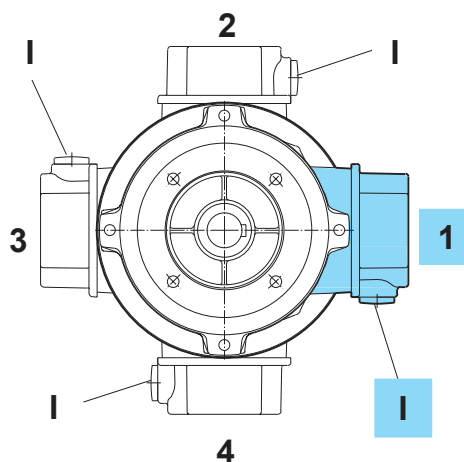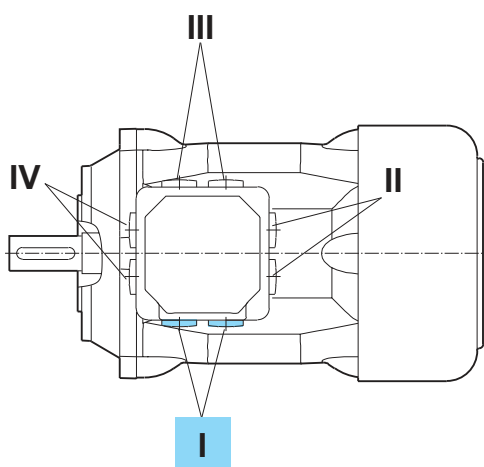

B14-BRE ventilated

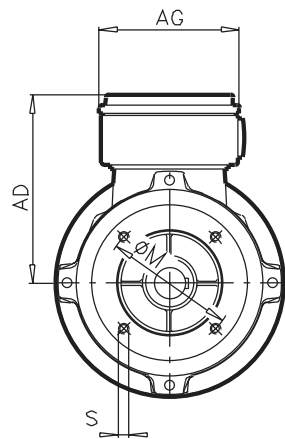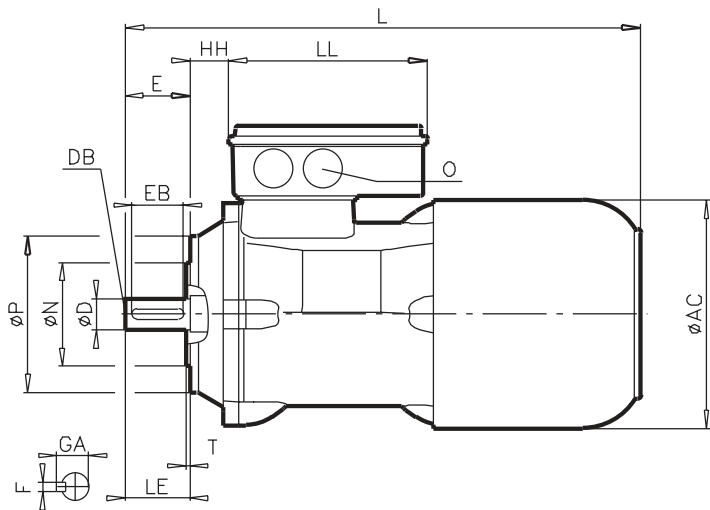

Type		BRE [Nm]	[mm]	M	N	P	S	T	AC	AD	AG	HH	L	LE	LL
HM	belüftet L/H														
80	LH	5 10		100	80	120	M6 x 12	3,0	156	135	108	26	340	40	153
90	SH	10 20		115	95	140	M8 x 15	3,0	176	145	108	30	401	50	153
100	SH/LH	10 20		130	110	160	M8 x 16	3,5	194	167	108	36	457	60	153




Type		BRE [Nm]	[mm]	M	N	P	S	T	AC	AD	AG	HH	L	LE	LL
HM	belüftet L/H														
80	LH	5 10		100	80	120	M6 x 12	3,0	156	135	108	26	340	40	153
90	SH	10 20		115	95	140	M8 x 15	3,0	176	145	108	30	401	50	153
100	SH/LH	10 20		130	110	160	M8 x 16	3,5	194	167	108	36	457	60	153

IM B14





IM V18

IM V19


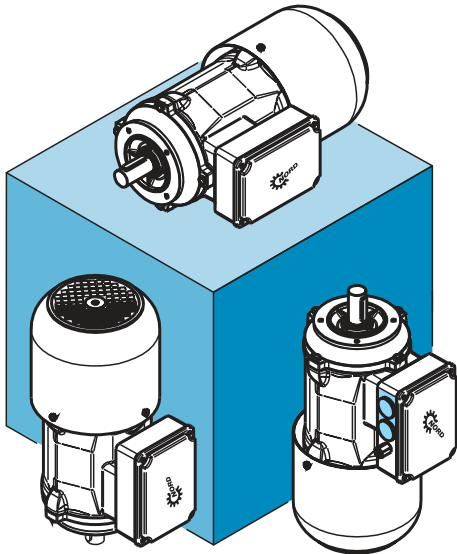




B14-BRE ventilated

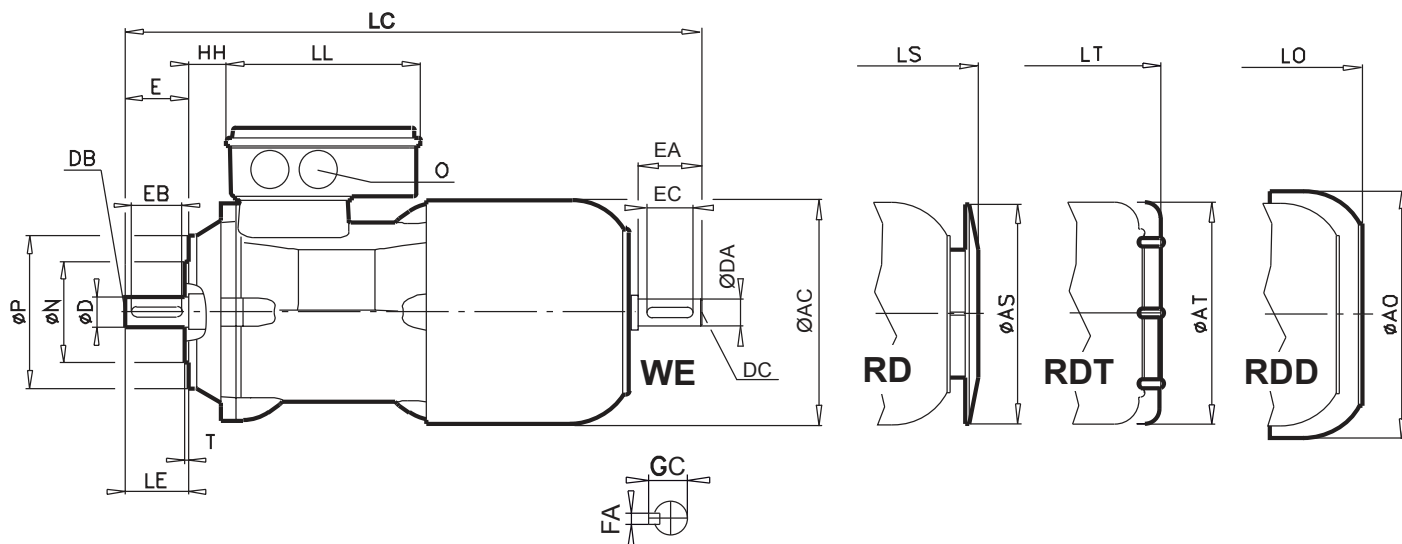

LC	AS	AT	A0	LS	LT	LO	O	D	DB	E	EB	F	GA	DA	DC	EA	EC	FA	GC
374	156	156	176	355	360	366	M25x1,5	19	M6	40	32	6	21,5	14	M5	30	20	5	16,0
439	176	176	194	416	420	431	M25x1,5	24	M8	50	40	8	27,0	14	M5	30	20	5	16,0
517	194	194	218	472	480	485	M32x1,5	28	M10	60	50	8	31,0	24	M8	50	40	8	27,0

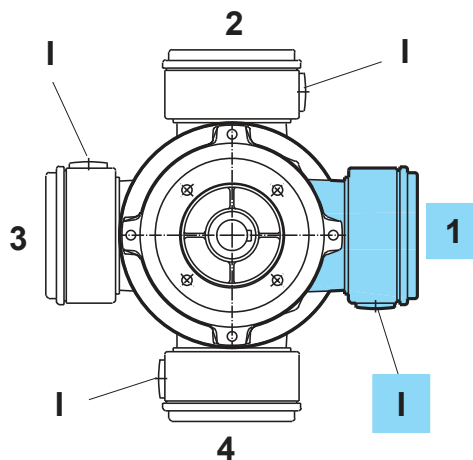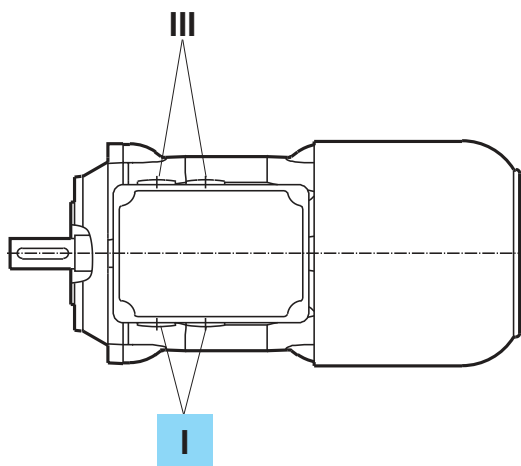

NORD smooth surface motors



Smooth motor – unventilated
with SMI worm gear



Smooth motor – unventilated
with 2-stage bevel gear

An overview of the NORD range

G1000 Fixed speeds UNICASE housing 50 Hz, 60 Hz

- Helical geared motors
- Parallel geared motors
- Bevel geared motors
- Helical worm geared motors

G4014 Electronic variable speed drives

- NORDBLOC.1 Helical geared motors
- Helical geared motors
- Parallel geared motors
- Bevel geared motors
- Helical worm geared motors

G1050 MAXXDRIVE Industrial gear units UNICASE housing 50 / 60 Hz

- Parallel-Axis
- Right-Angle

G1035 UNIVERSAL Worm gear units

- SI and SMI

F3018 Frequency inverter SK180E

F3020 Frequency inverter SK200E

F3060 NORDAC PRO Frequency inverter SK500P



NORD DRIVESYSTEMS Group

Headquarters and Technology center
in Bargteheide close to Hamburg

Innovative drive solutions
for more than 100 branches of industry

Mechanical products
parallel shaft, helical gear, bevel gear and worm gear units

Electrical products
IE2/IE3/IE4 motors

Electronic products
centralised and decentralised frequency inverters,
motor starters and field distribution systems

7 state-of-the-art production plants
for all drive components

Subsidiaries and distributors
in 89 countries on 5 continents
provide local stocks, assembly, production,
technical support and customer service

More than 4.900 employees throughout the world
create customer oriented solutions

www.nord.com/locator

Headquarters:

Getriebebau NORD GmbH & Co. KG
Getriebebau-Nord-Straße 1
22941 Bargteheide, Germany
Fon +49 (0) 4532 / 289-0
Fax +49 (0) 4532 / 289-2253
info@nord.com, www.nord.com

Member of the NORD DRIVESYSTEMS Group

