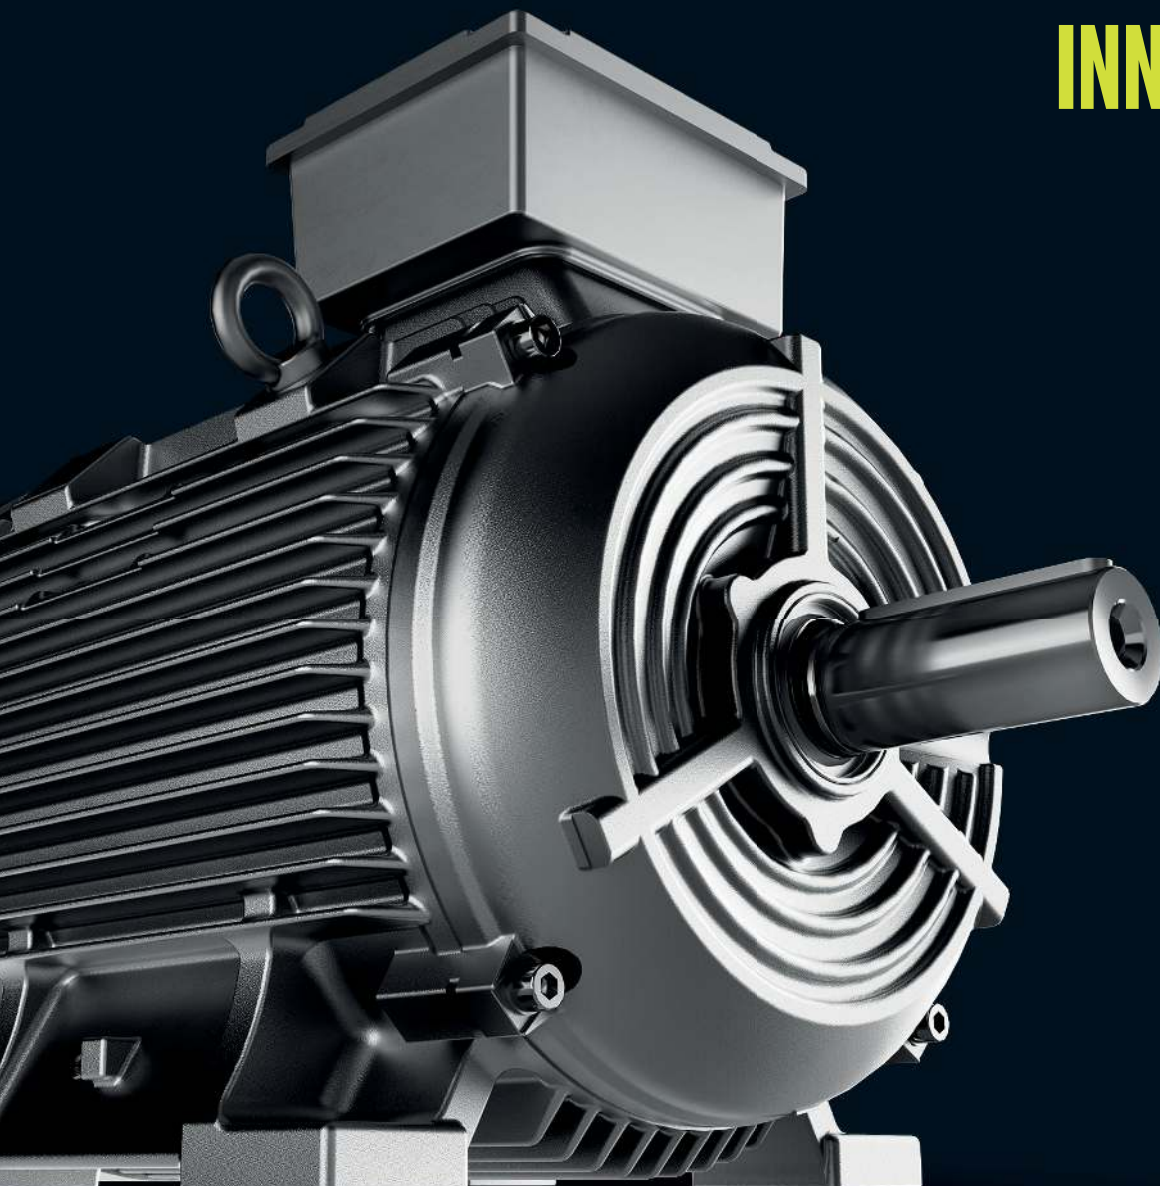


INNOMOTICS



Catalog D 81.6 | Edition 08/2026

Low Voltage Motors

Flow Line GP

Type series 1LE0323, 1LE0043 and 1LE8044

Frame sizes 80 to 355 | **Power range** 0.55 to 315 kW

innomotics.com/low-voltage-motors

Related catalogs

D 81.1 **Innomotics GP, SD, XP, DP Low-Voltage Motors**

Type series 1FP1, 1LE1, 1LE5, 1MB1, 1MB5, 1PC1
Frame sizes 63 to 450
Power range 0.09 to 1000 kW

PDF (INLVM-C00003-01-7600)

ME 81 **Application-specific motors Innomotics DP**

1PC14
Steel plant motors
Roller table motors

PDF (INLVM-C00007-00)

CR 81 **Innomotics Motors for Cranes**

Innomotics DP – Crane duty motors
Innomotics M – Main motors

PDF (INLVM-C00001-01-7600)

Innomotics Evaluate energy saving/energy efficiency tool

Further information on the subject of energy saving and the Innomotics Evaluate energy efficiency tool is available at the following address:

evaluate.innomotics.com/en

Innomotics Configurator

The Innomotics Configurator can be used on the Internet without requiring any installation. The Innomotics Configurator can be found in the Industry Mall at the following address:

configurator.innomotics.com

Innomotics FL Low-Voltage Motors

Type series 1LE0323, 1LE0043 and 1LE8044

Introduction

Innomotics motors
Technical features

1

Innomotics FL standard motors

Orientation
Flow Line · IE4 Super Premium Efficiency
Flow Line · IE3 Premium Efficiency
Article No. supplements and special versions
Dimensions

2

Catalog D 81.6 | July 2026

Supersedes:
Catalog D 81.6 | March 2026

This catalog is only applicable in designated
countries for the following regions:

- _ Africa
- _ Europe
- _ Middle East

© Innomotics 2026

For current updates of this catalog, refer to
innomotics.com

Please contact your local Innomotics branch

Introduction

1

1 Introduction

1/2 Innomotics motors

1/2 General information

1/7 Technical features

1/7 Versions in accordance with standards and specifications

1/8 Voltage and frequency

1/8 Tolerance for electrical data

1/9 Efficiency classes and efficiencies according to IEC 60034-30-1

1/11 Types of construction

1/11 IP rating

1/13 Windings and insulation

1/14 Rating plates

1/15 Coolant temperature and installation altitude

1/17 Motor protection

1/18 Converter operation

1/20 Noise levels

1/20 Bearings and lubrication

1/24 Terminal boxes

1/24 Packaging

1/25 Lifting eyes and transport

1/25 Certificates

1/26 Efficiency, power factor, rated speed, direction of rotation, rated torque

Introduction

General information

Overview

Innomotics – The name for the widest range of motors in the world

With 150 years of experience, we have driven motor technology forward, optimized them and played a decisive role in defining them.

Based on over 150 years of experience Innomotics offers with Innomotics the most comprehensive range of motors for industrial applications proven with more than 40 million Innomotics motors and drives installed around the world.

Our low-voltage motors meet the latest efficiency standards and stand for highest quality, reliability and compactness. Our motors are optimally integrated into the drive train.

Our foundation of outstanding quality is the unparalleled experience from numerous Innomotics production facilities around the world and close to our customers. This is how our experience drives your success!

Innomotics is present in more than 190 countries around the world and a true local global player. We manufacture locally serving the individual markets. All of our products are based on one common global quality and design standard derived from our german engineering roots adapted to global market requirements.

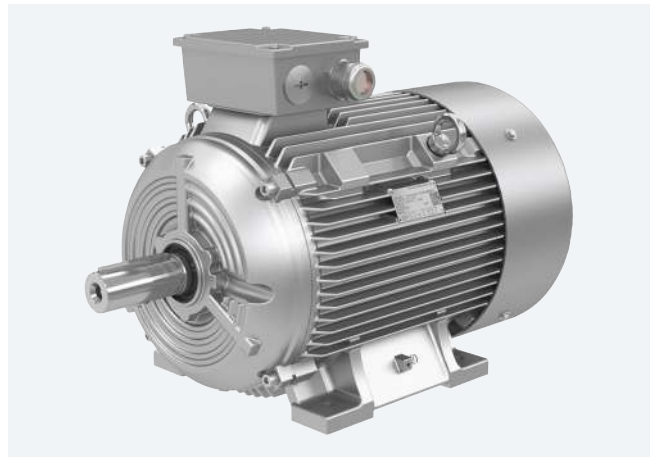
We are present in your local market, understand your market's needs and also comply with local requirements and standards.

Let us show you how our experience and our partnership will drive your success with a new motors series specifically defined for the distribution business.

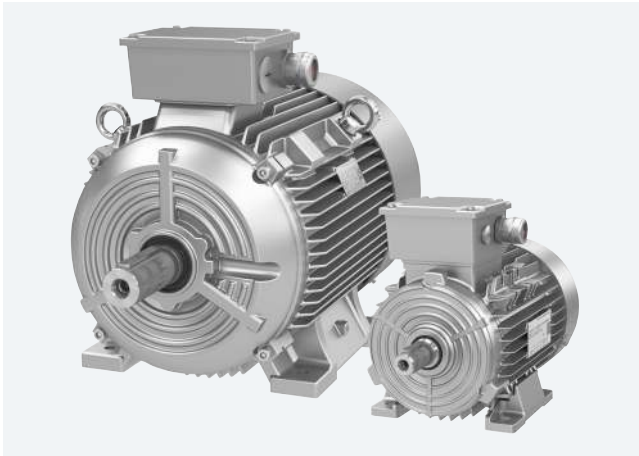
1



Innomotics 1LE0 with aluminum housing, frame size 90



Innomotics 1LE0 with cast-iron housing, frame size 180

Overview

Innomotics FL 1LE0 low-voltage motors

This catalog is using all of our 150 years experience and focuses on our Innomotics low-voltage IEC motors, especially defined for the distribution market and OEMs. It covers aluminum and cast-iron motor series.

Additional offering is always available from our standard motor catalog portfolio. For further information, please refer to catalog D 81.1. The Innomotics low voltage motors portfolio is covering efficiency classes from IE1 to IE4. This catalog describes only IE4 and IE3 solutions, which is according to the range of Innomotics FL series.

In addition to these general IE1, IE2 and IE3 solutions, Innomotics can also provide specific variants for specific markets i.e. in India, China etc. In such instances please consult your local Innomotics representative.

Brief overview	Aluminum motors 1LE0323
Power and voltage range:	0.55 ... 18,5 kW
Frame sizes	80 ... 160
Rated speed:	1000 ... 3000 rpm
Number of poles:	2, 4, 6
Efficiency classes:	_ IE3 (Premium Efficiency)

Brief overview	Cast-iron motors 1LE0043
Power and voltage range:	0.55 ... 55 kW
Frame sizes	80 ... 280
Rated speed:	1000 ... 3000 rpm
Number of poles:	2, 4, 6
Efficiency classes:	_ IE3 (Premium Efficiency)

Brief overview	Cast-iron motors 1LE8044
Power and voltage range:	75 ... 315 kW
Frame sizes	280 ... 355
Rated speed:	1000 ... 3000 rpm
Number of poles:	2, 4, 6
Efficiency classes:	_ IE4 (Super Premium Efficiency)

Introduction

General information

Benefits

Product highlights

Defined range of options – can be selected according to specific customer requirements. The 1LE0 and 1LE8 Innomotics FL motor is a standard motor without any built-in options.

Fulfill voltage and construction requirements –

The Innomotics FL offer additional selection of rated voltages and mounting types.

Common user and spare parts – are applicable within the 1LE0 and 1LE8 motor series Innomotics FL.

Rotatable terminal box

Global support – worldwide warranty and service

Application

Application note

- _ **Pump:** Energy saving for quadratic torque load with variable speed operation
- _ **Fan:** Ideal for flow control application
- _ **Material handling:** Effectively working with continuous and intermittent periodic duties. Reliable operation.

Technical specifications**Key features**

Standard Innomotics FL motor is without any build-in options. Defined range of options can be selected according to specific customer requirements.

Besides we can always offer you the most comprehensive motor portfolio made to order for all applications and industries available from our standard catalog portfolio D 81.1.

Low vibration

The low vibration results from o precision manufacturing and the use of defined and controlled quality components. The quality bearings used augment this and result in longer life and lower noise.

For more details, see technical features from page 1/20.

True IP55 as standard

Our IP55 design covers a vast majority of applications and is tested and proven for full lifetime, plus you have the full modification possibility within IP55 rating.

F to B thermal class for built-in reserve

The Innomotics motors are rated at normal sinusoidal voltage with a class B (130 °C) temperature rise. The windings are rated to class F (155 °C) thus allowing for reserve for the additional losses associated with variable speed drive operation and / or higher ambient temperature and / or overload conditions when operating directly on line.

F to F is possible for converter operation.

Converter operation for variable speed as standard

For all motors offered up to 460 V converter operation is possible as standard configuration – no special option or series is needed.

Global motor platform

Our motor design is based on one global motor platform with the same look and feel on all low-voltage motor IEC products.

Preparation for easy modifications and mountings

Preparation of the shaft extension at NDE can be ordered with the option "Prepared for mountings, threaded hole only", order code **G46** for the following frame sizes:

Frame size	Threaded hole acc. to DIN 332
80	DS M5
90	DS M6
100	DS M8
112	DS M8
132	DS M10
160	DS M12
180	DS M16
200	DS M20
225	DS M20
250	DS M20
280	DS M20
315	DS M20
355	DS M20

The length of the motor does not change because the shaft extension is still under the fan cover.

Introduction

General information

Technical specifications

Special features

1

DOL	Efficiency class Series	Innomotics FL Aluminum series IE3 1LE0323	Cast-iron series IE3 1LE0043	Cast-iron series IE4 1LE8044
		IE3 1LE0323	IE3 1LE0043	IE4 1LE8044
	Voltage up to	690 V	690 V	690 V
	Frequency	50 Hz	50 Hz	50 Hz
Converter operation up to		460 V _{rms}	460 V _{rms}	460 V _{rms}
Frame sizes		80 ... 160	80 ... 280	280 ... 355
Type of construction	Standard	IM B3	IM B3	IM B3
	Optional	IM B35, IM B14, IM B5, IM V1, IM B34	IM B35, IM B5, IM V1	IM B35, IM B5, IM V1
Bearing designation	Bearing 62 (DE/NDE)	☐	☐	-
	Bearing 63 (DE)	✓	✓	☐
	Bearing NU (DE)	-	✓	✓
Others	Metal fan cover	☐	☐	☐
	Metal rating plate	☐	☐	☐
	Drain hole	✓	✓	✓
	Threaded hole at non-drive end prepared for auxiliary mountings	✓	✓	✓
	Space heater	✓	✓	✓
Motor protection	3 × PTC	✓	✓	✓
Certificates, documentation	Extra rating plate for voltage tolerance	✓	✓	✓
	CE marking	☐	☐	☐
	Routine test	✓	✓	✓
Painting system	C2 standard paint system to EN ISO 12944-2	☐	☐	☐
Standard color	Stone gray (RAL 7030)	☐	☐	☐

- ☐ Standard
☒ Option
☐ Not possible

For converter operation with the powers specified in the catalog, the motors are used according to temperature class 155 (F), i.e. in this case neither a service factor > 1 nor an increased coolant temperature is possible.

Note:

All our motors are shown as 400 V as the nominal standard. The IEC 60034 regulations state that the rating plate data is only valid at the specific given voltage. In practice, all listed 400 V motors may be used at connection voltages 400 V ±5%.

The motors will function well, although there would be deviations from the nominal electrical rating plate data.

According to the standard, motors can also be operated at 400 V ±10% (Category B), only longer operation is not recommended.

Overview**Applicable standards and specifications**

Title	IEC
Efficiency classes and efficiencies	IEC 60034-30-1
Rotating electrical machines – Part 1: Rating and performance	IEC 60034-1
Rotating electrical machines – Part 2-1: Standard methods for determining losses and efficiency from tests (excluding machines for traction vehicles)	IEC 60034-2-1
Rotating electrical machines – Part 5: Degrees of protection provided by the integral design of rotating electrical machines (IP code) – Classification	IEC 60034-5
Rotating electrical machines – Part 6: Methods of cooling (IC Code)	IEC 60034-6
Rotating electrical machines – Part 7: Classification of types of construction, mounting arrangements and terminal box position (IM Code)	IEC 60034-7
Rotating electrical machines – Part 8: Terminal markings and direction of rotation	IEC 60034-8
Rotating electrical machines – Part 9: Noise limits	IEC 60034-9
Rotating electrical machines – Part 14: Mechanical vibration of certain machines with shaft heights 56 mm and higher – Measurement, evaluation and limits of vibration severity	IEC 60034-14
Rotating electrical machines – Part 1: Frame numbers 56 to 400 and flange numbers 55 to 1080	IEC 60072-1
Standard voltages	IEC 60038
Electrical insulation – Thermal classification	IEC 60085
Built-in thermal protection	IEC 60034-11

Introduction

Voltage and frequency · Tolerances for electrical data

Overview

Voltage and frequency

IEC 60034-1 differentiates between Category A (combination of voltage deviation $\pm 5\%$ and frequency deviation $\pm 2\%$) and Category B (combination of voltage deviation $\pm 10\%$ and frequency deviation $+3\%$ / -5%) for voltage and frequency fluctuations.

The motors can supply their rated torque in both Category A and B. In Category A, the temperature rise is approximately 10 K higher than during normal operation.

Standard 60034-1	Category A	Category B
Voltage deviation	$\pm 5\%$	$\pm 10\%$
Frequency deviation	$\pm 2\%$	$+4\%/-6\%$
Rating plate data stamped with rated voltage a (e.g. 230 V)	a $\pm 5\%$ (e.g. 230 V $\pm 5\%$)	a $\pm 10\%$ (e.g. 230 V $\pm 10\%$)
Rating plate data stamped with rated voltage ranges b to c (e.g. 220 V to 240 V)	b -5% to c $+5\%$ (e.g. 220 V -5% to 240 V $+5\%$)	b -10% to c $+10\%$ (e.g. 220 V -10% to 240 V $+10\%$)

In Category B, the standard does not recommend extended operation.

The selection and ordering data state the rated current at 400 V. The IEC 60038 standard specifies a tolerance of $\pm 10\%$ for line voltages of 230 V, 400 V and 690 V.

Rotors are dynamically balanced with half key. This corresponds to vibration quantity level A.

Limits (rms values) for max. vibration severity in terms of vibration displacement (s) and vibration velocity (v) for the shaft height H					
Vibration severity grade	Machine installation	Shaft height H in mm			
		$56 \leq H \leq 132$		$H > 132$	
		s_{rms} μm	v_{rms} mm/s	s_{rms} μm	v_{rms} mm/s
A	Free suspension	45	2.8	45	2.8
	Rigid clamping	–	–	37	2.3
B	Free suspension	18	1.1	29	1.8
	Rigid clamping	–	–	24	1.5

For details, see standard EN 60034-14 Aug. 2018, EN 60034-14:2004 + A1:2007

Tolerances for electrical data

- Efficiency η at
 - $P_{rated} \leq 150$ kW: $-0.15 \cdot (1 - \eta)$
 - $P_{rated} > 150$ kW: $-0.10 \cdot (1 - \eta)$
 - With η being a decimal number
- Power factor
 - Power factor $= \frac{1 - \cos \varphi}{6}$
 - Minimum absolute value: 0.02
 - Maximum absolute value: 0.07
- Slip $\pm 20\%$ (for motors < 1 kW $\pm 30\%$ is admissible)
- Locked-rotor current $+20\%$
- Locked-rotor torque -15% to $+25\%$
- Breakdown torque -10%
- Moment of inertia $\pm 10\%$

Overview**Standardization of the efficiency classes**

Different energy efficiency standards exist worldwide for induction motors: To promote international standardization, the international standard IEC 60034-30-1 03/2014 (Rotating electrical machines – Part 30-1: Efficiency classes of single-speed, three-phase, cage-induction motors (IE code) was created. This groups low-voltage asynchronous motors into new efficiency classes (first released in October 2008).

Applicability (excerpt)

The efficiency classes are grouped according to the following nomenclature (IE = International Efficiency):

- _ Low-voltage motors up to 1000 V (50/60 Hz with line operation)
- _ Rating: 0.12 to 1000 kW; with 2, 4, 6, or 8 poles
- _ Operating mode: S1

The efficiencies in IEC 60034-30-1 are based on the method for determining losses according to IEC 60034-2-1:2014.

Standardization of the efficiency classes

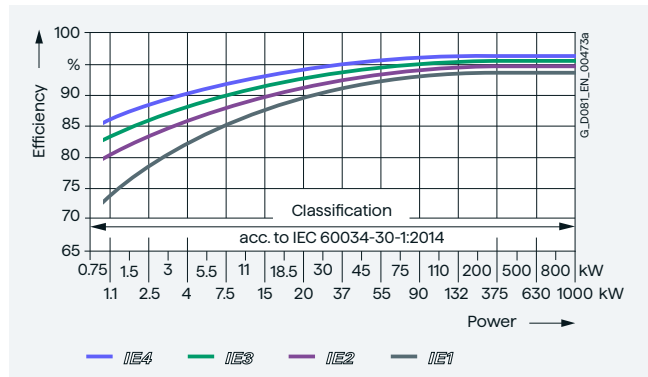
The efficiency classes are grouped according to the following nomenclature (IE = International Efficiency):

- _ IE1 (Standard Efficiency)
- _ IE2 (High Efficiency)
- _ IE3 (Premium Efficiency)
- _ IE4 (Super Premium Efficiency)

IEC 60034-30-1	NEMA MG1	GB 18613-2020
IE4		Grade 2 (IE4)
IE3	Premium Efficient (60 Hz)	Grade 3 (IE3)

Comparison of IE efficiency classes**Note:**

All efficiency classes are stated with reference to 50 Hz data (unless specified otherwise).



IE1-IE4 efficiencies, 4-pole, 50 Hz, according to power

Introduction

Efficiency classes and efficiencies according to IEC 60034-30-1

Overview

Background information

Comprehensive laws have been introduced in the European Union with the objective of reducing energy consumption and therefore CO₂ emissions. EU Regulations 640/2009 and 2019/1781 concern the energy consumption or efficiency of induction motors in the industrial environment. This regulation is in force in every country of the European Economic Area until June 30, 2021.

Effective July 1, 2021, the new regulation (EU) 2019/1781 will come into force. The main contents of and exceptions to both regulations are explained below.

Regulation (EC) 640/2009

Exceptions

- _ Motors that are designed to be operated totally submerged in a liquid;
- _ Motors fully integrated into a product (e.g. a gear unit, pump, fan or compressor) whose energy efficiency cannot be measured independently of the product;
- _ Motors that are specially designed for operation under the following conditions:
 - _ At altitudes greater than 4000 meters above sea level;
 - _ At ambient temperatures above 60 °C;
 - _ At maximum operating temperatures above 40 °C;
 - _ At ambient temperatures below -30 °C
 - _ With cooling liquid temperatures at the product intake of below 0 °C or above 32 °C;
 - _ In hazardous areas in the context of Directive 2014/34/EU of the European Parliament and Council;
- _ Brake motors

The following motors are not affected:

- _ Pole-changing motors
- _ Synchronous motors
- _ Motors for intermittent duty S2 to S9
- _ Single-phase motors
- _ Motors specially developed for converter operation in accordance with IEC 60034-25

The following changes came into effect on the dates below:

From January 1, 2015:

Compliance with the legally required minimum efficiency class IE3 for a power range from 7.5 to 375 kW (2-, 4-, 6-pole) or, as an alternative, IE2 motor plus frequency converter.

From January 1, 2017:

Compliance with the legally required minimum efficiency class IE3 for a power range from 0.75 to 375 kW (2-, 4-, 6-pole) or, as an alternative, IE2 motor plus frequency converter.

From July 1, 2021:

Compliance with the legally required minimum efficiency class IE2 for a power range from 0.12 to 0.75 kW (2-, 4-, 6-, and 8-pole).

From July 1, 2023:

Compliance with the legally required minimum efficiency class IE4 for a power range from 75 to 200 kW (2-, 4- and 6-pole).

New regulation (EU) 2019/1781

Exceptions

- _ Motors that are designed to be operated totally submerged in a liquid
- _ Motors fully integrated into a product (e.g. a gear unit, pump, fan or compressor) whose energy efficiency cannot be measured independently of the product
- _ Motors that are specially designed for operation under the following conditions:
 - _ At altitudes greater than 4000 meters above sea level
 - _ Where ambient temperatures exceed 60 °C
 - _ At maximum operating temperatures above 400 °C
 - _ At ambient temperatures below -30 °C
 - _ With cooling liquid temperatures at the product intake of below 0 °C or above 32 °C
 - _ In hazardous areas as defined in Directive 2014/34/EU of the European Parliament and Council that are designed and certified for underground mining applications
 - _ Motors with an integrated brake that is an integral part of the interior motor structure and can neither be removed or powered from a separate source during motor efficiency testing.
 - _ Motors with an integrated speed control (compact drives), whose energy efficiency cannot be tested independently of the speed control

The following motors are not affected:

- _ Pole-changing motors
- _ Synchronous motors
- _ Totally enclosed, naturally ventilated motors (TENV motors);
- _ Motors specially developed for converter operation in accordance with IEC 60034-25

Other potential restrictions as described in the technical documentation may apply to converter operation and must be taken into account!

The following are generally recommended for converter operation:



- _ Motor temperature detection by embedded temperature sensor
- _ Bearing insulation with frame size 225 and larger

Overview

In addition to the basic IM B3 type of construction, motors can also be supplied in other types of construction.

The possible versions in our selection for a particular motor type can be taken from the table below.

Standard types of construction and special types of construction

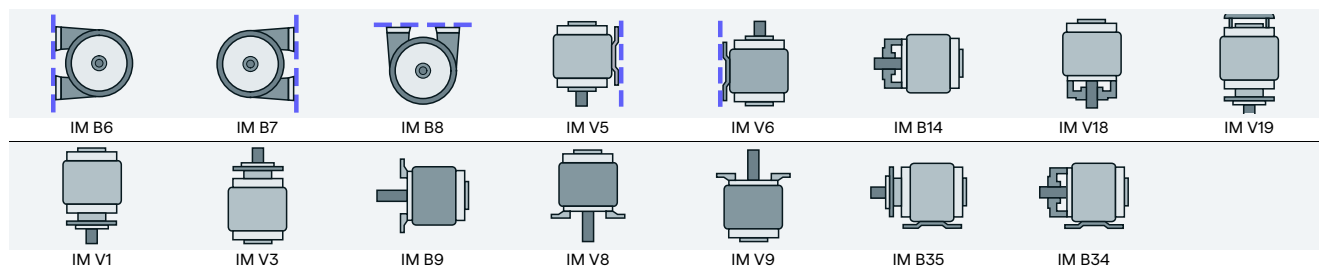
Type of construction acc. to IEC 60034-7		Frame size	Letter of the 14th position of the Article No.	Additional identification code –Z with order code
Without flange				
IM B3/IM 1001		80 to 355	A	–
With flange				
IM B5/IM 3001		80 to 315	F	–
IM V1/IM 3011 without protective cover		80 to 355	G	–
IM B35/IM 2001		80 to 355	J	–
With flange				
IM B14/IM 3601		80 to 160	K	–
IM B34/IM 2101		80 to 160	N	–

Apart from the distribution portfolio covered types of construction, here is the general overview of the possible types of construction. Many of them can be achieved by modifying this offered portfolio. Anything else can still be supplied out of our standard catalog portfolio, see D 81.1.

Note:

When mounting the motors in diverse orientations consider the location of the drain hole – it must be at the lowest point to drain water.

Mounting motors in orientations other than these intended could lead to mechanical or structural premature failure. If in any doubt, please consult your Innomotics partner.

Types of construction according to DIN IEC 34, Part 7

Introduction

IP rating

Overview

The IP code (or Ingress Protection Rating, sometimes also interpreted as International Protection Rating) consists of the letters IP followed by two digits or one digit and one letter and an optional letter. As defined in international standard IEC 60529, IP code classifies and rates the degrees of protection provided against the intrusion of solid objects, dust, accidental contact, and water in mechanical casings and with electrical enclosures

IP	5	5
		Code number indicating protection against water
		Code number indicating touch protection and protection against foreign bodies
		International Protection

Note:

Some manufacturers offer sealing and protection above IP55. Although it is available as an option, Innomotics prefers a true IP55 as a default standard.

- IP55 covers the vast majority of applications as it offers dust and rain protection
- The IP55 is stable over the life of the motor.
Higher protections can need maintenance or an exact assembly to ensure that the higher protection is real and not just on paper.
- Modifications can be made on an IP55 motor whilst maintaining that degree of protection.

Solids, first digit

The first digit indicates the level of protection that the enclosure provides against access to hazardous parts (e.g., electrical conductors, moving parts) and the ingress of solid foreign objects.

Level	Object size protected against	Effective against
0	–	No protection against contact and ingress of objects
1	> 50 mm	Any large surface of the body, such as the back of a hand, but no protection against deliberate contact with a body part
2	> 12.5 mm	Fingers or similar objects
3	> 2.5 mm	Tools, thick wires, etc.
4	> 1 mm	Most wires, screws, etc.
5	Dust protected	Ingress of dust is not entirely prevented, but it must not enter in sufficient quantity to interfere with the satisfactory operation of the equipment; complete protection against contact
6	Dust tight	No ingress of dust; complete protection against contact

Note:

A suitable degree of protection should be selected depending on the operating and environmental conditions. Innomotics offers a standard which is most suitable and applicable over the lifetime of a motor such as true IP55 standard.

Liquids, second digit

Protection of the equipment inside the enclosure against harmful ingress of water.

Level	Protected against	Testing for	Details
0	Not protected	–	–
1	Dripping water	Dripping water (vertically falling drops) shall have no harmful effect.	Test duration: 10 minutes Water equivalent to 1 mm rainfall per minute
2	Dripping water when tilted up to 15°	Vertically dripping water shall have no harmful effect when the enclosure is tilted at an angle up to 15° from its normal position.	Test duration: 10 minutes Water equivalent to 3 mm rainfall per minute
3	Spraying water	Water falling as a spray at any angle up to 60° from the vertical shall have no harmful effect.	Test duration: 5 minutes Water volume: 0.7 liters per minute Pressure: 80–100 kN/m ²
4	Splashing water	Water splashing against the enclosure from any direction shall have no harmful effect.	Test duration: 5 minutes Water volume: 10 liters per minute Pressure: 80–100 kN/m ²
5	Water jets	Water projected by a nozzle (6.3 mm) against enclosure from any direction shall have no harmful effects.	Test duration: at least 3 minutes Water volume: 12.5 liters per minute Pressure: 30 kN/m ² at distance of 3 m
6	Powerful water jets	Water projected in powerful jets (12.5 mm nozzle) against the enclosure from any direction shall have no harmful effects.	Test duration: at least 3 minutes Water volume: 100 liters per minute Pressure: 100 kN/m ² at distance of 3 m
7	Immersion up to 1 m	Ingress of water in harmful quantity shall not be possible when the enclosure is immersed in water under defined conditions of pressure and time (up to 1 m of submersion).	Test duration: 30 minutes Immersion at depth of 1 m
8	Immersion beyond 1 m	The equipment is suitable for continuous immersion in water under conditions which shall be specified by the manufacturer. Normally, this will mean that the equipment is hermetically sealed. However, with certain types of equipment, it can mean that water can enter but only in such a manner that it produces no harmful effects.	Test duration: continuous immersion in water Depth specified by manufacturer

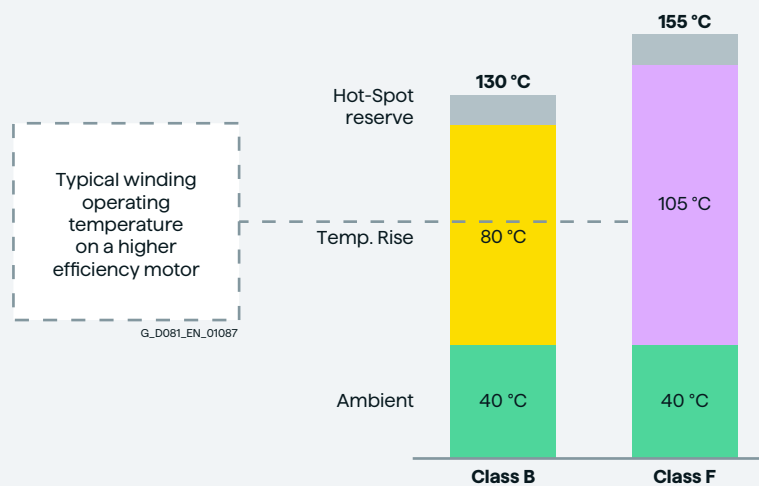
Overview**Thermal class**

The Innomotics motors are rated at normal sinusoidal voltage with a class B (130 °C) temperature rise. The windings are rated to class F (155 °C) thus allowing for reserve for the additional losses associated with variable speed drive operation and/or higher ambient temperature and/or overload conditions.

The temperature rise of the winding of the motor is important. It provides a great insight into the design of the motor and its life expectancy. The cooler a motor runs the better its life expectancy and longer its life. Innomotics builds motors to a minimum of class F (155 °C) on all material – continuous operation for a very long life expectancy.

The more efficient the motor, the less heat it produces – to the extent that modern motors often only run with internal temperatures of 95 °C – much cooler than the limits set by the standards.

Innomotics uses double coated wires with DURIGNIT insulation materials and capable varnishes – we consider all components including electrical connections and bearing grease – our motors are true class F under all circumstances – with reserve built in on top.

1**Note:**

Innomotics builds motors with reserve: The motors are capable to operate at least at 155 °C (class F) but we only rate at a nominal 130 °C (class B).

Introduction

Rating plates

Overview

Examples of rating plates

1

○ INNOTOTICS				THREE-PHASE ASYNCHRONOUS MOTOR				Ⓜ ○	
Made in P.R. China								CE	
3-Mot. OAV3130A			1LE0323-1CC02-2AA4-Z		LMH-2406 / 800003888993 / 001				
132S	IMB3	IP55	46 kg	Th.Cl.155(F)					
BRG DE 6208 2Z C3		BRG NDE 6208 2Z C3		IEC60034					
				AMB 40°C					
V	Hz	kW	A	EFF.(%)	cos φ	r/min	EFF.Cl.		
230V Δ/400VY	50	3	11.7/6.7	85.6	0.75	965	IE3	○	

G_D081_XC_01085

Rating plate for aluminum motor series 1LE0323

○ INNOTOTICS				THREE-PHASE ASYNCHRONOUS MOTOR				(H) ○			
Made in P.R. China								CE			
3-Mot. OCV3182A			1LE0043-1EA23-4AB4-Z			LMH-2406 / 800003888993 / 001					
180M		IMB3	IP55	162 kg	Th.Cl.155(F)						
BRG DE 6210 Z C3			BRG NDE 6210 Z C3			IEC60034					
						AMB 40°C					
V		Hz	kW	A	EFF.(%)	cos φ	r/min	EFF.Cl.			
400V Δ/660VY		50	22	38.5/22.5	92.7	0.89	2950	IE3			

G_D081_XC_01085

Rating plate for cast-iron motor series 1LE0043

	26	25	24	23	22		20	
1	○ INNOTICS		THREE-PHASE ASYNCHRONOUS MOTOR				○ (H)	
2	Made in P.R. China						CE	
3	3-Mot. OCV3204A		1LE0043-2AA43-4AA4-Z		LMH-2406 / 800003888993 / 001			
4	200L	IMB3	IP55	219 kg	Th.Cl.155(F)			
5	BRG DE 6212 C3		BRG NDE 6212 C3		IEC60034			
6	Grease: Unirex N3							
7	Re-grease interval: 4000h				AMB 40°C			
	Quantity: 20g							
	V	Hz	kW	A	EFF.(%)	cos φ	r/min	EFF.Cl.
	400V Δ/690VY	50	30	52/30.0	93.3	0.89	2955	IE3
	8	9	10	11	12	13	14	15
	○		○					

G. D081_EN.01090

G_D081_EN_01190

- | | |
|--|---------------------------------|
| 1 Motor type number (MT) | 17 QR code |
| 2 Type of machine AC low-voltage motor | 18 Standards and specifications |
| 3 Frame size | 19 Product series number |
| 4 Bearing type | 20 Balance method |
| 5 Bearing grease type | 21 Standards and specifications |
| 6 Re-grease interval | 22 Temperature class |
| 7 Re-grease quantity | 23 Article No. |
| 8 Rated voltage and connection | 24 Weight of machine [kg] |
| 9 Frequency [Hz] | 25 Degree of protection |
| 10 Rated output [kW] | 26 Type of construction |
| 11 Rated current | |
| 12 Efficiency | |
| 13 Power factor | |
| 14 Rated speed | |
| 15 IEC Efficiency class | |
| 16 Temperature class | |

Explanation of the standard rating plate

Overview**Derating**Environmental

- _ Degree of motor protection IP55 (IEC 60034-5).
- _ Altitude shall not exceed 1000 m above sea level (IEC 60034-1).
- _ Allowed air temperature between -20 and 40 °C (IEC 60034-1).
- _ Permitted relative humidity:
 - _ -20 °C < T < 20 °C: 100%
 - _ 20 °C < T < 30 °C: 95%
 - _ 30 °C < T < 40 °C: 55%

For higher coolant temperatures and / or site altitudes higher than 1000 m above sea level, the specified motor must be reduced by using the factor k_{HT} . This results in an admissible output (P_{adm}) of the motor:

$$P_{adm} = P_{rated} \cdot k_{HT}$$

1Reduction factor k_{HT} for different site altitudes and/or coolant temperatures

Site altitude above sea level m	Ambient temperature/coolant temperature					
	< 30 °C	30 ... 40 °C	45 °C	50 °C	55 °C	60 °C
1000	1.07	1.00	0.96	0.92	0.87	0.82
1500	1.04	0.97	0.93	0.89	0.84	0.79
2000	1.00	0.94	0.90	0.86	0.82	0.77
2500	0.96	0.90	0.86	0.83	0.78	0.74
3000	0.92	0.86	0.82	0.79	0.75	0.70
3500	0.88	0.82	0.79	0.75	0.71	0.67
4000	0.82	0.77	0.74	0.71	0.67	0.63

Note:

If operating conditions exceed above values, please contact our local sales office for the selection of catalog motors.

Introduction

Coolant temperature and installation altitude

Overview

Anti-condensation

Moisture is present in the air around us. Under the correct circumstances it can condensate. The warmer the air the higher the possible moisture content. As air cools the moisture carrying content reduces to the point when the moisture condenses – called the "dew point".

This condition can be met several times a day under normal operation, as a motor operates and cools at differing times of the day.

Smaller motors are less susceptible than larger motors due to the smaller volume of moist air possible in the motor. Dew moisture condenses and accumulates in a motor, which is seen as water collection. The water accumulates at the lowest point of the motor. It often does no harm as long as the collection point is below the level of the electrical system.

Two points that need to be paid attention to are, first, how much water there is in the air and when it will condensate. The second is, whether it will do any harm.

Relative humidity	Temperature							
	20 °C	30 °C	40 °C	50 °C	60 °C	70 °C	80 °C	90 °C
10%	2	3	5	8	13	20	29	42
15%	3	5	8	12	19	30	44	63
20%	3	6	10	17	26	39	58	84
25%	4	8	13	21	32	49	73	105
30%	5	9	15	25	39	59	87	126
35%	6	11	18	29	45	69	102	146
40%	7	12	20	33	52	79	116	167
45%	8	14	23	37	58	89	131	188
50%	9	15	26	41	65	98	145	209
55%	10	17	28	46	71	108	160	230
60%	10	19	31	50	78	118	174	251
65%	11	20	33	54	84	128	189	272
70%	12	21	36	58	91	138	203	293
75%	13	23	38	62	97	148	218	314
80%	14	24	41	66	104	157	233	335
85%	15	26	43	70	110	167	247	356
90%	16	27	46	74	117	177	262	377
95%	16	29	49	79	123	187	276	398
100%	17	30	51	83	130	197	291	419

If operating conditions exceed temperatures of 60 °C, please contact our local sales office for the selection of catalog motors.

The table shows the weight of moisture contained in the air, given as g/m³.

The local temperature is on the X-axis and the local relative humidity is shown on the Y-axis.

Light gray fields show normal conditions.

Medium gray fields show higher moisture – not available in Innomotics FL, only from our standard catalog portfolio D 81.1

Dark gray fields show moisture above 60 g water per m³ of air – not available in Innomotics FL, only from our standard catalog portfolio D 81.1

Note:

In humid climates, during motor cool down the air inside contracts, pulling in fresh, warm, humid air. This humidity condensates inside the motor, forming water droplets. Those water droplets have to drain.

Therefore on many motors, especially the larger ones, Innomotics has foreseen drain holes as standard. For Innomotics FL series they are optionally.

Overview

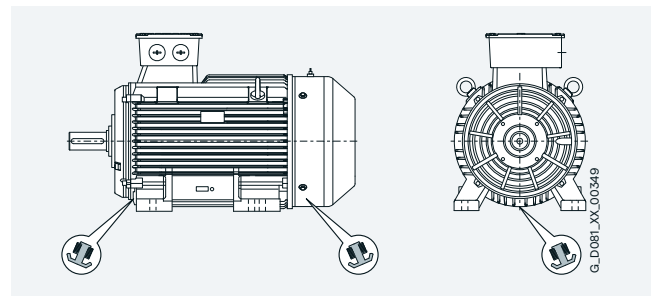
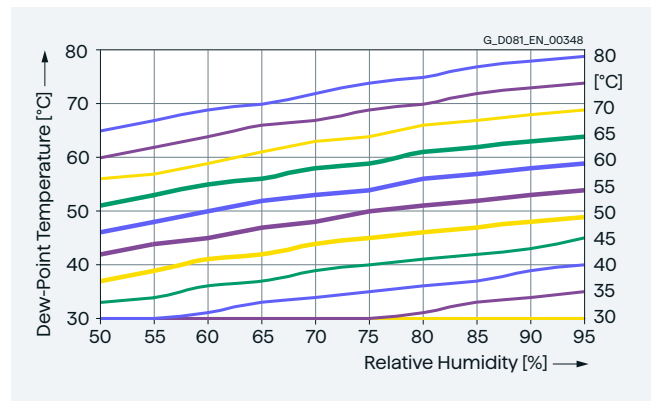
Anti-condensation heating can be provided for motors where there is a danger that moisture condensation will form on the winding due to the climatic situation. This anti-condensation heater warms up the air in the motor to a temperature above the dew point temperature in order to prevent condensation forming inside the motor. The anti-condensation heating must not be switched on while the motor is operating.

The graphic shows the temperature at which the moisture in the air will condensate to water. The lines on the right show the local temperature. The X-axis gives the local relative humidity. The "dew point" temperature can be read on the Y-axis.

Note:

Another possible solution is to connect a voltage to the stator terminals U1 and V1 that should be between 4 and 10% of the rated motor voltage.

Approximately 20 to 30% of the rated current is sufficient in order to achieve an adequate temperature rise to avoid condensation.



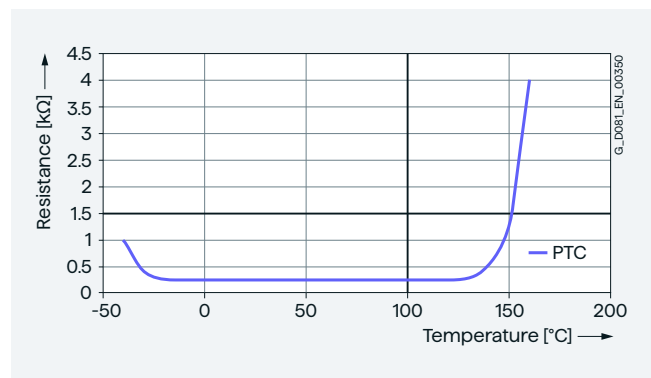
Motor with option code **Q02** and drain hole location

Motor protection**Overview****PTC thermistors – Thermistor motor protection**

PTC thermistor temperature sensors are predominantly used for thermistor motor protection devices (alarm or shutdown) for motors. These thermistors are generally integrated in the winding overhang. As a consequence, the stator winding is directly protected. The temperature difference between alarm and shutdown (trip) is 10 K.

When a limit temperature is reached (nominal tripping temperature), the resistance of PTC thermistors will have a step change. This is evaluated by a tripping unit and can be used to open auxiliary circuits.

Thermal protection with PTC thermistors with 3 embedded temperature sensors for tripping are optionally. Connection can be done through 2 auxiliary terminals in the terminal box.

Note:

The PTC thermistors themselves cannot be subjected to high currents and voltages. This would result in destruction of the semiconductor. The switching hysteresis of the PTC thermistor and tripping unit is low, which supports fast restarting of the drive. Motors with this type of protection are recommended for heavy duty starting, switching duty, extreme changes in load, high ambient temperatures or fluctuating supply systems.

Introduction

Converter operation

Overview

Converter application

The insulation system of our motors is capable for converter operation as standard.

Our motors are suitable e.g. for pumps, fans, compressors, textile machines and mechanical machine applications where variable or constant speed is required.

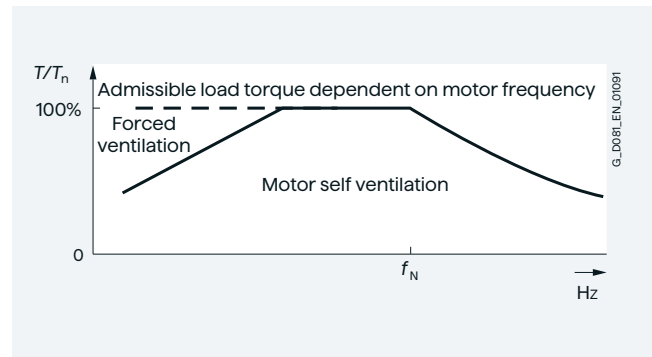
In applications where the motor is driven by a converter, the degree of electrical interference depends on the type of converter used (type, number of IGBTs, interference suppression measures, and manufacturer), cabling, distance and application requirements. The installation guidelines of the converter manufacturer with regards to electromagnetic compatibility must be considered at all times during the design and implementation phases.

At rated output with converter operation, the motors will be used in temperature class 155 (F). To prevent damage as a result of bearing currents, insulated bearings are recommended to be assembled for frame size 250 and above. Please inquire Innomotics about the detailed information of insulated bearing.

Converter operation

The standard insulation of our motors is designed such that operation is possible on the converter at mains voltage up to 460 V.

Our motors are capable for converter operation with certain characteristics load, of which the load torque characteristics is referred in the following diagram:



By usage with admissible torque and below, the motor can be operated with self cooling; by usage over the admissible torque line, the motor with forced ventilation is needed. Forced ventilation is currently not part of the Innomotics FL scope.

Note:

These motors do not have a special series for converter operation – they are suited as standard direct-on-line operation or converter operation.

At operating speeds above rated speed the noise and vibration levels increase and the bearing lifetime reduces. Attention should be paid to the re-greasing intervals and the grease service life. For converter operation with frequencies greater than 60 Hz special balancing is required for compliance with the specified limit values.

Overview**Mechanical stress and grease lifetime (converter operation)**

High speeds that exceed the rated speed and the resulting increased vibrations alter the mechanical running smoothness and the bearings are subject to increased mechanical stress. This reduces the grease lifetime and the bearing lifetime. More detailed information on request.

Ventilation/noise generation (converter operation)

The fan noise can increase at speeds that are higher than the rated speed of self-ventilated motors. To increase motor utilization at low speeds it is recommended that forced ventilated motors are used.

Mechanical limit speeds

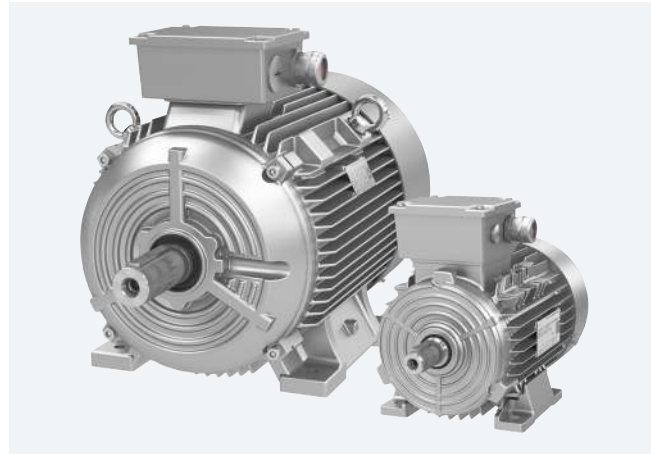
When the motor is operated at its rated frequency, it is important to note that the maximum speeds are limited by the limits for the bearings, critical rotor speed and rigidity of the rotating parts.

With converter operation, the reduction factors for constant torque and drives for fans, pumps and compressors must be observed.

Mechanical limit speeds $n_{\max}$ at maximum supply frequency $f_{\max}$ for Innomotics FL

1LE0						
Frame size	Mechanical speed limit					
	2-pole		4-pole		6-pole	
	$n_{\max}$ rpm	$f_{\max}$ Hz	$n_{\max}$ rpm	$f_{\max}$ Hz	$n_{\max}$ rpm	$f_{\max}$ Hz
80	5200	87	3600	120	2400	120
90	5200	87	3600	120	2400	120
100	5200	87	3600	120	2400	120
112	5200	87	3600	120	2400	120
132	4500	75	2700	90	2400	120
160	4500	75	2700	90	2400	120
180	4500	75	2700	90	2400	120
200	4500	75	2300	77	1800	90
225	3600	60	2300	77	1800	90
250	3600	60	2300	77	1800	90
280	–	–	–	–	1800	90

1LE8						
Frame size	Mechanical speed limit					
	2-pole		4-pole		6-pole	
	$n_{\max}$ rpm	$f_{\max}$ Hz	$n_{\max}$ rpm	$f_{\max}$ Hz	$n_{\max}$ rpm	$f_{\max}$ Hz
280	3600	60	3000	100	–	–
315	3600	60	2300	77	1800	90
355	3600	60	2300	77	1800	90

**Note:**

By use of converter operation, motors can run at speeds higher than 50 Hz nominal speed. High speeds that exceed the rated speed of a motor can lead to increased vibration and substantially decrease the life expectancy of the bearings.

The maximum mechanical speed of a motor must not be exceeded due to risk of failure. More detailed information on request.

Introduction

Noise levels

Overview

Motors are often used in applications in which noise is a primary concern. The use of converters can excite the surfaces of motors and the sound of diverse frequencies can be resonated in the cooling channels.

Innomotics has addressed this issue by modifying the core design. Surfaces, shapes and materials and air channels have been optimized. The result is a motor which is quieter, especially with converter operation.

In order to define the motor noise level, the A-weighted sound pressure level ($L_{p(A)}$) is measured at several points on the measuring plane (1 m away from the motor surface).

The measurement is carried out in a room with low reflection. As a result of noise reflection, the level can be increased up to 3 dB (A) depending on the acoustic properties of the surroundings.

The A sound power level (L_{WA}) is normally used when engineering projects and when it is necessary to determine the noise radiated from a group of motors whose envelope dimensions differ significantly.

For sound power level, see "Selection and ordering data" from page 2/4.

Bearings and lubrication

Overview

The bearings are especially important in order that the motor runs perfectly. A good selection of bearing will guarantee long lubrication intervals, low noise, low-vibration operation and longer lifetime as well.

There are many types of bearing: diverse ball and roller bearings, tapered roller bearings and specialized bearings. Innomotics has selected an applicable range of single-shielded and double-shielded bearings. Z for when regreasing is needed and ZZ when no regreasing is wished for.

Sealed-for-life bearings are avoided as they bring inherent disadvantages in operation temperatures and limit operating speeds.

Special bearings are avoided due to their disadvantages outside of their specific application.

Note:

Factors that reduce the lifetime of a bearing:

- _ Operating a motor beyond the rated speed increases the motor vibration and results in an additional radial and axial force on the bearing.
- _ Increased motor vibration due to the environment or other equipment results in an higher radial and axial force.

The bearing lifetime of motors with horizontal type of construction is at least 40000 hours if there is no additional axial loading at the coupling output and at least 20000 hours with the maximum admissible loads.

This assumes that the motor is operated at 50 Hz.

A bearing is only as good as its lubrication. Innomotics designed a special lithium complex grease – Unirex N3.

It gives a super thermal stability for optimized bearing life. The grease gives a great temperature range from –30 to 130 °C – with an intermittent temperature reserve to 165 °C.

Grease lifetime and regreasing intervals for horizontal installation

Motor series	Frame size	No. of poles	Grease lifetime up to CT 40 °C
Permanent lubrication			
1LE0	80 ... 160	2	20000 h
		4, 6	40000 h
	180 ... 250	2	20000 h
		4, 6	40000 h
Regreasing device(L23)			
1LE0	100 ... 160	2, 4, 6	8000 h
	180 ... 250	2	4000 h
		4, 6	8000 h
	280	6	5000 h
Permanent lubrication			
1LE8	250 ... 315	2	4000 h
		4, 6	5000 h
	355	2	3000 h
		4, 6	4000 h

Overview**Cantilever force**

This force acts transversely at the center line of the motor shaft extension. The cantilever force is calculated from the circumferential force multiplied by the pre-tension factor, which is dependent on the mechanical transmission characteristics of the particular belt.

For motors with deep-groove ball bearings, the permissible cantilever force can be increased by replacing the bearings at the drive end with cylindrical roller bearings.

In order to calculate the admissible cantilever forces for a radial load, the line of force (i.e. the center line of the pulley) of the cantilever force F_Q (N) must lie within the free shaft extension (dimension x).

Dimension x (mm) is the distance between the point of application of force F_Q and the shaft shoulder.

Dimension $x_{\max}$ corresponds to the length of the shaft extension. Total cantilever force is calculated using the following equation.

$$F_Q = c \cdot F_u$$

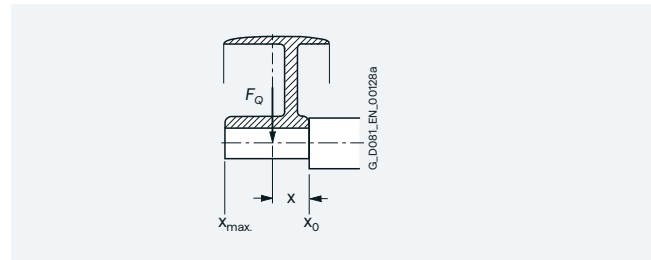
The pre-tension factor c is a value gained from experience by the belt manufacturer. The following approximate value can be assumed.

- _ For normal flat leather belts with an idler pulley, $c = 2$.
- _ For V-belts, $c = 2$ to 2.5.
- _ For special synthetic belts (depending on the type and load), $c = 2$ to 2.5.

The circumferential force F_u (N) is calculated using the following equation.

$$F_u = 2 \cdot 10^7 \frac{P}{n \cdot D}$$

F_u	circumferential force in N
P	rated motor power (transmitted power) in kW
n	rated motor speed in rpm
D	belt pulley diameter in mm.

**Belt drive**

A belt drive is used to connect two parallel shafts, the motor shaft with the shaft of the driven machine, whereby the speed can be simultaneously changed corresponding to the ratio between the two belt pulley diameters.

The belt must be pre-tensioned so that it can transmit the circumferential force through friction. The pre-tension factor indicates how much higher the actual tension load (cantilever force) is than the circumferential force (peripheral force).

Today, flat belts are almost always manufactured out of plastic with an adhesive coating (e.g. chrome leather).

Pre-tension factor, approx. 2 to 2.5.

The pre-tension factor for V-belts is approx. 1.5 to 2.5.

The belt must be able to transmit the power at the defined circumferential velocity. This defines the belt thickness and width. The belt supplier specifies the pre-tension factor. The recommended circumferential velocity is approx. 35 m/s for flat belts and approx. 25 m/s for V-belts. Steel belt pulleys must be used for circumferential velocities greater than 26 m/s due to the centrifugal force which occurs.

The actual cantilever force (belt tension) must be compared with the cantilever force permissible for the motor to select the correct motor and bearing sizes.

Introduction

Bearings and lubrication

Overview

Bearing selection table for 1LE0 motors – basic version

Frame size	No. of poles	Drive end (DE) bearing Horizontal and vertical types of construction	Non-drive end (NDE) bearing Horizontal and vertical types of construction
1LE0323 and 1LE0043			
80	2 ... 6	6204 2Z C3	6204 2Z C3
90	2 ... 6	6205 2Z C3	6205 2Z C3
100	2 ... 6	6206 2Z C3	6206 2Z C3
112	2 ... 6	6206 2Z C3	6206 2Z C3
132	2 ... 6	6208 2Z C3	6208 2Z C3
160	2 ... 6	6209 2Z C3	6209 2Z C3
1LE0043			
180	2 ... 6	6210 Z C3	6210 Z C3
200	2 ... 6	6212 Z C3	6212 Z C3
225	2 ... 6	6213 Z C3	6213 Z C3
250	2 ... 6	6215 C3	6215 C3
280	6	6317 C3	6317 C3
1LE8044			
280	2	6315 C3	6315 C3
280	4	6316 C3	6316 C3
315	2	6316 C3	6316 C3
315	4 ... 6	6319 C3	6319 C3
355	2	6317 C3	6317 C3
355	4 ... 6	6322 C3	6322 C3

Bearing selection table for 1LE0 motors – bearings for increased cantilever forces – order code L22

Frame size	No. of poles	Drive end (DE) bearing Horizontal and vertical types of construction	Non-drive end (NDE) bearing Horizontal and vertical types of construction
1LE0323 and 1LE0043			
80	2 ... 6	–	–
90	2 ... 6	–	–
100	2 ... 6	6306 2Z C3	6206 2Z C3
112	2 ... 6	6306 2Z C3	6206 2Z C3
132	2 ... 6	6308 2Z C3	6208 2Z C3
160	2 ... 6	6309 2Z C3	6209 2Z C3
1LE0043			
180	2 ... 6	NU210	6210 Z C3
200	2 ... 6	NU212	6212 Z C3
225	2 ... 6	NU213	6213 Z C3
250	2 ... 6	NU215	6215 C3
280	6	NU317	6317 C3
1LE8044			
280	2	NU315	6315 C3
280	4	NU316	6316 C3
315	2	NU316	6316 C3
315	4 ... 6	NU319	6319 C3
355	2	NU317	6317 C3
355	4 ... 6	NU322	6322 C3

Note:

When the load pulls sideways on the shaft, it is called a radial load. A heavy radial load is a belt or pulley drive.

If in doubt, it is common to use or strengthened bearings.

Overview**Bearings – Cantilever forces**Admissible cantilever forces – basic version**1LE0 and 1LE8 motors (frame sizes 80 ... 355)**Valid are: x_0 values for $x = 0$ and $x_{\max}$ values for $x = l$ (l = shaft extension)

For motors		Admissible cantilever force F_Q	
Frame size	No. of poles	at x_0	at $x_{\max}$.
		N	N
1LE0323 motors – values for IE3 motors			
80	2	620	510
	4	790	640
	6	910	740
90	2	700	560
	4	880	720
	6	1020	820
100	2	980	790
	4	1230	990
	6	1420	1140
112	2	980	790
	4	1230	990
	6	1420	1140
132	2	1440	1120
	4	1820	1420
	6	2080	1630
160	2	1560	1240
	4	1970	1570
	6	2260	1800
1LE0043 motors – values for IE3 motors			
80	2	620	510
	4	790	640
	6	910	740
90	2	700	560
	4	880	720
	6	1020	820
100	2	980	790
	4	1230	990
	6	1420	1140
112	2	980	790
	4	1230	990
	6	1420	1140
132	2	1440	1120
	4	1820	1420
	6	2080	1630
160	2	1560	1240
	4	1970	1570
	6	2260	1800
180	2	1820	1470
	4	2300	1900
	6	2630	2150
200	2	2650	2230
	4	3350	2800
	6	3850	3230
225	2	3000	2540
	4	3700	3000
	6	4250	3470
250	2	3150	2620
	4	3950	3280
	6	4600	3820
280	6	9650	8120
1LE8044motors – values for IE4 motors			
280	2	5950	4950
	4	7750	6520
	6	–	–
315	2	6150	5200
	4	8790	7350
	6	10350	8550
355	2	6430	5700
	4	12000	10400
	6	13050	11300

Admissible cantilever forces – bearings for increased cantilever forces – order code **L22****1LE0 and 1LE8 motors (frame sizes 80 ... 355) at 50 Hz**

with reinforced deep-groove bearings at DE

Valid are: x_0 values for $x = 0$ and $x_{\max}$ values for $x = l$ (l = shaft extension)

For motors		Admissible cantilever force F_Q	
Frame size	No. of poles	at x_0	at x_{max} .
		N	N
1LE0323 motors – values for IE3 motors			
80	2	–	–
	4	–	–
	6	–	–
90	2	–	–
	4	–	–
	6	–	–
100	2	1480	1220
	4	1870	1540
	6	2140	1720
112	2	1480	1220
	4	1870	1540
	6	2140	1720
132	2	2100	1700
	4	2720	2170
	6	3100	2420
160	2	2650	2120
	4	3300	2600
	6	3750	2900
1LE0043 motors – values for IE3 motors			
100	2	1480	1220
	4	1870	1540
	6	2140	1720
112	2	1480	1220
	4	1870	1540
	6	2140	1720
132	2	2100	1700
	4	2720	2170
	6	3100	2420
160	2	2650	2120
	4	3300	2600
	6	3750	2900
180	2	3300	2700
	4	4200	3400
	6	4750	3900
200	2	5000	4200
	4	6330	5320
	6	7250	6080
225	2	5650	4800
	4	6950	5600
	6	7900	6500
250	2	6700	5600
	4	8500	7000
	6	9500	7800
280	6	20000	17000
1LE8044 motors – values for IE4 motors			
280	2	19900	8900
	4	25700	11200
	6	–	–
315	2	21350	9050
	4	34240	13200
	6	38600	13100
355	2	22920	12300
	4	44450	20800
	6	49500	20500

Introduction

Terminal boxes

Overview



1

Technical specifications for terminal boxes for 1LE0 motors

Frame size	Number of terminals	Max. auxiliary terminals	Thread of the contact screw	Max. connectable cable mm ²	Outer cable diameter (sealing end) mm	Cable entry
1LE0323						
80	6	12	M4	1,5	13 ... 18	M25 × 1,5 + M16 × 1,5
90						
100				4	18 ... 25	M32 × 1,5 + M32 × 1,5
112						
132				6		
160			M5	16		M36 × 2 + M36 × 2
1LE0043						
80	6	12	M4	1,5	13 ... 18	M25 × 1,5 + M16 × 1,5
90						
100				4	18 ... 25	M32 × 1,5 + M32 × 1,5
112						
132				6		
160		14	M5	16	22 ... 32	M40 × 1,5 + M40 × 1,5
180						
200			M6	25	32 ... 38	M50 × 1,5 + M50 × 1,5
225			M8	35		
250			M10	120	37 ... 44	M63 × 1,5 + M63 × 1,5
280						
1LE8044						
280	6	14	M10	120	37 ... 44	M63 × 1,5 + M63 × 1,5
315		16	M12	240		
355		24	M16		44 ... 57	M72 × 2 + M72 × 2

Packaging

Overview

Packaging size

Frame size	Packaging size mm		
	Length	Width	Height
80	395	220	300
90	455	220	310
100	515	270	355
112	555	270	370
132	685	330	425
160	740	470	610
180	810	470	640

Frame size	Packaging size mm		
	Length	Width	Height
200	890	520	705
225	970	570	760
250	1010	670	850
280	1330	715	995
315	1480	855	1180
355	1730	955	1460

Overview

Handling and storage

When lifting the motors, always use the lifting eyes provided. Prior to lifting the motor make sure that the lifting eyes are installed correctly and tightened.

Never lift a motor using the rotor shaft and fan cover.

In addition, care must be taken during lifting and lowering of the motor to avoid any shocks or vibrations which can result in bearing damages.

It is recommended that all motors be stored in a dry, dust-free environment and free of excessive vibrations.

If the DE and NDE bearings are of the sealed types, it is recommended that they are replaced if storage has exceeded 2 years from date of motor manufacture. If the motors have the regreasable bearings, then the recommendation is to replace the grease after 2 years of storage.

The service life of the motor can be considerably reduced if the storage period extends beyond 2 years in environments with high moisture and dirt. If necessary, the insulation resistance of the winding could be measured to determine the health of the motor prior to installation and start-up.

Machined surfaces (flange, DE rotor shaft) are treated at the factory with an anticorrosive agent to prevent rusting. However, these surfaces should be retreated during storage as deemed necessary. It is recommended that the motor shaft is rotated by hand on a frequent basis to ensure even grease distribution.

1

Certificates

ISO 9001 Quality Management System Certificate and ISO 14001 Environmental Management System Certificate

Introduction

Rated power, rated torque, speed

Overview

Rated power

Power is the work performed in a unit of time, measured in W (Watt).

Dimensions:

$$\begin{aligned}
 1 \text{ W} &= \text{J/s (1 Joule per second)} \\
 &= 1 \text{ Nm/s (1 Newton meter per second)} \\
 &= 1 \text{ kgm}^2/\text{s}^3 \\
 &= 0.102 \text{ kpm/s} \\
 1 \text{ kW} &= 1.36 \text{ hp}
 \end{aligned}$$

The following applies to three-phase motors:

$$P_N = \sqrt{3} \cdot V_{\text{supply}} \cdot I_{\text{supply}} \cdot \eta \cdot \cos\phi$$

P_N	Rated power in W
V	Rated voltage in V
I	Line current in A
η	Efficiency
$\cos\phi$	Power factor

The rated power is one of the most important parameters of a motor. According to DIN 42673 – and maintaining the regulations according to VDE 0530 – the individual motor frame sizes are assigned specific power ratings for continuous duty S1. Different operating conditions or different duty types generally result in a change in the rated power.

Rated torque

Torque is generated by the effect of force applied to a lever arm. This is the product of force multiplied by the vertical distance from the axis of rotation; for belt drives, e.g. circumferential force multiplied by the radius of the belt pulley.

$$T = \frac{9.55 \cdot P \cdot 1000}{n}$$

M	Torque in Nm
P	Power in kW
n	Speed in rpm

Speed

The synchronous speed n_s (rpm) of a three-phase induction motor is obtained from the line frequency f and the pole pair number p (4-pole $\rightarrow 2p = 4$).

$$n_s = \frac{120 \cdot f}{2 \cdot p}$$

When connected to a 50 Hz line supply, a $2p = 4$ -pole motor has a synchronous speed of

$$\frac{120 \cdot 50}{4} = 1500 \text{ rpm}$$

The synchronous speeds of the generally used 2, 4, and 6-pole motors are correspondingly obtained at a line frequency of 50 Hz 3000, 1500, 1000 rpm

The rotor of a three-phase induction motor rotates with a lower speed (with slip) than the rotating field.

Slip s is calculated according to the following formula:

$$s_{\text{rated}} = \frac{n_s - n_{\text{rated}}}{n_s} \cdot 100$$

s	Slip as a%
n_s	Synchronous speed in rpm
n	Rotor speed in rpm

The rated slip s_N is correspondingly calculated.

The rotor losses of the motor are approximately proportional to the slip. The objective is to achieve a low rated slip in order to achieve a good efficiency.

The rated slip depends on the motor size.

For instance, for small motors, it is approx. 10% and for large motors, approx. 1%.

Innomotics FL

standard motors

2

2

Innomotics FL standard motors

2/4 Flow Line · IE4 Super Premium Efficiency

Cast-iron series Innomotics FL

2/4 _ 1LE8044

2/5 Flow Line · IE3 Premium Efficiency

Aluminum series Innomotics FL

2/5 _ 1LE0323

Cast-iron series Innomotics FL

2/6 _ 1LE0043

Selection and ordering data

The article number consists of a combination of figures and letters and is divided into three blocks linked with hyphens for a better overview, e.g.:

1LE0323-0DA22-2AA4-Z
H03

The first block (positions 1 to 7) identifies the motor type. The second block (positions 8 to 12) defines the motor frame size and length, the number of poles and power and in some cases the frequency/voltage. In the third block (positions 13 to 16), the frequency/voltage, type of construction and further design features are encoded.

For deviations in the second and third block from the catalog codes either **Z** should be used as appropriate.

Ordering data:

- _ Complete Article No. and order code(s) or plain text
- _ If a quotation has been requested, please specify the quotation number in addition to the Article No.
- _ When ordering a complete motor as a spare part, please specify the works serial No. for the previously supplied motor as well as the Article No.

Structure of the Article No.:		Position:	1	2	3	4	5	6	7	-	8	9	10	11	12	-	13	14	15	16
1st to 4th position: Digit, letter, letter, digit	_ Flow Line – self-ventilated by a fan mounted on and driven by the rotor		1	L	E	0														
			1	L	E	8														
5th and 6th position: 2 digits	Aluminum housing Cast-iron housing						3	2												
							0	4												
7th position: Digit	Motors with IE4 Super Premium Efficiency Motors with IE3 Premium Efficiency								4											
									3											
8th, 9th and 11th position: Digit, letter, digit	Motor frame size (frame size as a combination of shaft height and overall length, encoded)										0	D		0						
											...	...		...						
											3	B		7						
10th position: Letter	No. of poles A: 2-pole, B: 4-pole, C: 6-pole												A							
													...							
													C							
12th and 13th position: 2 digits	Voltage, circuit and frequency (encoded with two digits)														2		1			
															...		...			
															3		5			
14th position: Letter	Type of construction (encoded with A ... N)																	A		
																		...		
																		N		
15th position: Letter	Motor protection A: without winding protection B: PTC thermistors for tripping																		A	
																			B	
16th position: Digit	Terminal box position 4: Terminal box top																			4
	Special order versions: encoded – additional order code required																			- Z

Ordering example

Selection criteria	Requirement	Structure of the Article No.
Motor type 1LE0	Standard motor with IE3 Premium Efficiency, IP55 degree of protection, cast-iron housing	1LE0043-■■■■■-■■■■■
Motor frame size/No. of poles/Speed	180 M/2-pole/3000 rpm	1LE0043-1EA2-■■■■■
Rated power	22 kW	1LE0043-1EA23-4■■■■■
Voltage and frequency	400 VΔ/690 VY, 50 Hz	1LE0043-1EA23-4A■■■■■-Z
Type of construction with special version	IM B3 (standard)	H03
Motor protection	Without protection	1LE0043-1EA23-4AA■■■■■-Z
		H03
Terminal box position	Terminal box top	1LE0043-1EA23-4AA4-Z
		H03

Selection and ordering data

P _{Rated} , 50 Hz/ P50 kW	Frame size FS	IE class	Operating values at rated power										L _{ptA} , 50 Hz dB(A)	L _{WA} , 50 Hz dB(A)	Cast-iron series 1LE8044 Article No.	m _M B3	J
			η _{rated} 50 Hz	T _{rated} 50 Hz	η _{rated} 50 Hz, 4/4	η _{rated} 50 Hz, 3/4	η _{rated} 50 Hz, 2/4	cosφ _{rated} 50 Hz, 4/4	I _{rated} 50 Hz, 400 V	Start- ing current	Start- ing torque	Break down torque					
			rpm	Nm	%	%	%		A								
Cooling: Self-ventilated (IC 411)																	
Efficiency according to IEC 60034-30-1: IE4 Premium Efficiency																	
Insulation: Thermal class 155 (temperature class F), IP55 degree of protection, utilization in accordance with thermal class 130 (temperature class B)																	
2-pole: 3000 rpm at 50 Hz																	
75	280 S	IE4	2978	241	95.6	95.6	95	0.9	126	8.5	2.8	3.2	75	89	1LE8044-2DA0	555	0.897
90	280 M	IE4	2980	288	95.8	95.7	94.9	0.9	151	8.5	2.7	3.6	75	89	1LE8044-2DA2	585	1.01
110	315 S	IE4	2982	352	96	95.9	95.2	0.89	186	8.5	2.4	2.4	77	92	1LE8044-3AA0	840	1.85
132	315 M	IE4	2985	422	96.2	96.2	95.6	0.89	225	8.5	2.5	2.7	77	92	1LE8044-3AA2	910	2.15
160	315 L	IE4	2982	512	96.3	96.4	95.9	0.89	270	8.5	3	2.6	77	92	1LE8044-3AA5	990	2.47
185	315 L	IE4	2982	592	96.5	96.6	96.4	0.89	310	8.5	3.3	2.6	77	92	1LE8044-3AA6	1100	2.85
200	315 L	IE4	2975	642	96.5	96.9	96.9	0.89	335	7.5	2.9	2.2	77	92	1LE8044-3AA7	1120	2.85
220	355 M	IE4	2986	704	96.5	96.3	95.4	0.91	360	8.5	2.6	2.6	82	97	1LE8044-3BA2	1450	2.91
250	355 M	IE4	2982	801	96.5	96.4	95.7	0.91	410	8.5	2.4	2.4	82	97	1LE8044-3BA3	1450	2.91
280	355 L	IE4	2985	896	96.5	96.4	95.7	0.91	460	8.5	3	3.1	82	97	1LE8044-3BA5	1610	3.41
315	355 L	IE4	2982	1009	96.5	96.4	95.7	0.91	520	8.5	3	3.1	82	97	1LE8044-3BA6	1610	3.41
4-pole: 1500 rpm at 50 Hz																	
75	280 S	IE4	1490	481	96	96.3	96.1	0.87	130	8.5	2.8	3	66	80	1LE8044-2DB0	605	1.848
90	280 M	IE4	1488	578	96.1	96.4	96.4	0.88	154	8.5	2.8	3	66	80	1LE8044-2DB2	685	2.156
110	315 S	IE4	1491	705	96.3	96.5	96.1	0.86	192	8.5	2.8	2.5	69	84	1LE8044-3AB0	935	3.35
132	315 M	IE4	1490	846	96.4	96.6	96.3	0.86	230	8.5	2.9	2.3	69	84	1LE8044-3AB2	970	3.53
160	315 L	IE4	1490	1026	96.6	97	96.9	0.87	275	8.5	3	2.2	71	86	1LE8044-3AB5	1130	4.24
185	315 L	IE4	1490	1186	96.7	97.1	97.1	0.87	315	8.5	3.1	2.2	71	86	1LE8044-3AB6	1200	4.64
200	315 L	IE4	1490	1282	96.7	97.1	97.1	0.87	345	8.5	3.2	2.3	71	86	1LE8044-3AB7	1230	4.92
220	355 M	IE4	1490	1410	96.7	96.8	96.5	0.88	375	8.5	2.5	2.8	76	91	1LE8044-3BB2	1660	5.7
250	355 M	IE4	1490	1602	96.7	96.9	96.6	0.88	425	8.5	2.3	2.8	76	91	1LE8044-3BB3	1690	5.92
280	355 L	IE4	1490	1795	96.7	97	96.8	0.88	475	8.5	2.4	2.6	76	91	1LE8044-3BB5	1770	6.19
315	355 L	IE4	1490	2019	96.7	96.9	96.7	0.88	530	8.5	2.3	2.6	76	91	1LE8044-3BB6	1860	6.67
6-pole: 1000 rpm at 50 Hz																	
75	315 S	IE4	991	723	95.4	95.8	95.7	0.83	137	8	2.1	2.1	66	81	1LE8044-3AC0	845	3.95
90	315 M	IE4	992	866	95.6	96	95.9	0.83	164	8	2.6	2.1	66	81	1LE8044-3AC2	900	4.52
110	315 L	IE4	992	1059	95.8	96.2	96.2	0.83	200	8	2.8	2.3	66	81	1LE8044-3AC5	980	5.02
132	315 L	IE4	992	1271	96	96.4	96.4	0.82	240	8	2.6	2.6	66	81	1LE8044-3AC6	1050	5.71
160	355 M	IE4	993	1539	96.2	96.4	96.1	0.84	285	8	2.5	2.5	76	91	1LE8044-3BC2	1650	10.52
185	355 M	IE4	993	1779	96.3	96.6	96.4	0.84	330	7.8	2.5	2.5	76	91	1LE8044-3BC3	1660	10.52
200	355 M	IE4	992	1925	96.3	96.6	96.4	0.84	355	7.7	2.4	2.5	76	91	1LE8044-3BC4	1710	11.11
220	355 L	IE4	994	2114	96.4	96.6	96.4	0.84	390	8	2.5	2.7	76	91	1LE8044-3BC5	1780	11.53
250	355 L	IE4	993	2404	96.5	96.7	96.4	0.84	445	8	2.9	2.9	76	91	1LE8044-3BC6	1920	13.02

Voltages

50 Hz 400 VΔ/690 VY

For other voltages and more information, see Innomotics Configurator.

Types of construction

Without flange IM B3
 With flange IM B5
 With flange IM B14

Version

Standard
 With additional charge
 With additional charge

For other types of construction and more information, see Innomotics Configurator.

Motor protection

Without
 3 PTC thermistors - for tripping

Version

Standard
 With additional charge

For other motor protection and more information, see Innomotics Configurator.

Terminal box position

Terminal box top

Version**Standard**

For other terminal box position and more information, see Innomotics Configurator.



Order code

Order code

-

-

Order code

-

Innomotics FL standard motors

IE3

Aluminum series Innomotics FL 1LE0323

Selection and ordering data

P _{rated} , 50 Hz/ P50 kW	Frame size FS	IE class	Operating values at rated power												Aluminum series 1LE0323		m _M B3	J
			η _{rated} 50 Hz	T _{rated} 50 Hz	η _{rated} 50 Hz, 4/4	η _{rated} 50 Hz, 3/4	η _{rated} 50 Hz, 2/4	cos φ _{rated} 50 Hz, 4/4	I _{rated} 50 Hz, 400 V	Starting current	Starting torque	Break down torque	L _{pfa} , 50 Hz	L _{WA} , 50 Hz				
			rpm	Nm	%	%	%		A									
Cooling: Self-ventilated (IC 411)																		
Efficiency according to IEC 60034-30-1: IE3 Premium Efficiency																		
Insulation: Thermal class 155 (temperature class F), IP55 degree of protection, utilization in accordance with thermal class 130 (temperature class B)																		
2-pole: 3000 rpm at 50 Hz																		
0.75	80 M	IE3	2835	2.5	80.7	82.9	82.9	0.86	1.56	6	2.6	3	51	62	1LE0323-0DA2	■ - ■■■■■■	12.5	0.00208
1.1	80 M	IE3	2850	3.7	82.7	84	83.9	0.83	2.30	6.5	2.6	3.4	51	62	1LE0323-0DA3	■ - ■■■■■■	13	0.00154
1.5	90 S	IE3	2870	5	84.2	84.8	82.3	0.86	3.00	7	2	3	58	70	1LE0323-0EA0	■ - ■■■■■■	18	0.00276
2.2	90 L	IE3	2890	7.3	85.9	87.2	86.5	0.88	4.20	7.5	2.8	3.6	58	70	1LE0323-0EA4	■ - ■■■■■■	22	0.00356
3	100 L	IE3	2865	10	87.1	88.3	88.3	0.87	5.7	8	3.7	3.6	60	72	1LE0323-1AA4	■ - ■■■■■■	29	0.00462
4	112 M	IE3	2915	13.1	88.1	89.6	89.8	0.9	7.3	7.8	2.6	3.6	62	74	1LE0323-1BA2	■ - ■■■■■■	36	0.00879
5.5	132 S	IE3	2930	17.9	89.2	90.2	90.3	0.89	10.0	7.5	2.3	3.6	65	77	1LE0323-1CA0	■ - ■■■■■■	50	0.01847
7.5	132 S	IE3	2930	24.4	90.1	91.5	92.2	0.9	13.3	7.5	2.3	3.6	65	77	1LE0323-1CA1	■ - ■■■■■■	56	0.02323
11	160 M	IE3	2935	35.8	91.2	92	91.7	0.89	19.6	7.5	2.3	3.4	69	81	1LE0323-1DA2	■ - ■■■■■■	84	0.03903
15	160 M	IE3	2935	48.8	91.9	92.6	92.5	0.89	26.5	7.5	2.4	3.4	69	81	1LE0323-1DA3	■ - ■■■■■■	94	0.0472
18.5	160 L	IE3	2935	60.2	92.4	93	92.9	0.89	32.5	7.8	2.4	3.4	69	81	1LE0323-1DA4	■ - ■■■■■■	109	0.05773
4-pole: 1500 rpm at 50 Hz																		
0.55	80 M	IE3	1445	3.6	80.8	81.8	80.2	0.76	1.29	5.5	2.2	3.2	45	56	1LE0323-0DB2	■ - ■■■■■■	11	0.00216
0.75	80 M	IE3	1440	5	82.5	82.9	80.7	0.75	1.75	6	2.6	3.7	45	56	1LE0323-0DB3	■ - ■■■■■■	13	0.0025
1.1	90 S	IE3	1445	7.3	84.1	85.1	83.9	0.79	2.40	6.5	2.7	3.7	47	59	1LE0323-0EB0	■ - ■■■■■■	18.5	0.00389
1.5	90 L	IE3	1445	9.9	85.3	86	85.2	0.79	3.20	6.5	2.8	3.8	47	59	1LE0323-0EB4	■ - ■■■■■■	22	0.00499
2.2	100 L	IE3	1445	14.5	86.7	87.1	85.7	0.81	4.50	8.3	3.4	4.6	52	64	1LE0323-1AB4	■ - ■■■■■■	32	0.01125
3	100 L	IE3	1440	19.9	87.7	88.1	87.1	0.81	6.1	8.3	3.7	4.6	52	64	1LE0323-1AB5	■ - ■■■■■■	36	0.01313
4	112 M	IE3	1450	26.3	88.6	89.6	89.2	0.81	8.0	7.8	3.7	4.6	53	65	1LE0323-1BB2	■ - ■■■■■■	43	0.01493
5.5	132 S	IE3	1455	36.1	89.6	90.9	91.1	0.84	10.5	7.8	2.6	3.8	59	71	1LE0323-1CB0	■ - ■■■■■■	58	0.02847
7.5	132 M	IE3	1455	49.2	90.4	91.7	93.2	0.85	14.1	7.8	2.6	3.8	59	71	1LE0323-1CB2	■ - ■■■■■■	71	0.03561
11	160 M	IE3	1465	72	91.4	92.4	92.6	0.86	20.0	7.8	2.4	3.8	61	73	1LE0323-1DB2	■ - ■■■■■■	95	0.06482
15	160 L	IE3	1465	97.8	92.1	92.9	93	0.86	27.5	8.2	2.6	3.8	61	73	1LE0323-1DB4	■ - ■■■■■■	112	0.08109
6-pole: 1000 rpm at 50 Hz																		
0.55	80 M	IE3	940	5.6	77.2	77.5	74.6	0.67	1.53	5	2.7	3.4	44	55	1LE0323-0DC3	■ - ■■■■■■	15	0.0031
0.75	90 S	IE3	940	7.6	78.9	80.3	78	0.7	1.96	5	2.4	3.2	45	57	1LE0323-0EC0	■ - ■■■■■■	19	0.00436
1.1	90 L	IE3	945	11.1	81	81.6	80.4	0.69	2.85	5.5	2.7	3.5	45	57	1LE0323-0EC4	■ - ■■■■■■	22	0.00513
1.5	100 L	IE3	950	15.1	82.5	84.1	82.9	0.74	3.55	5.5	2.5	3.5	49	61	1LE0323-1AC4	■ - ■■■■■■	33	0.01136
2.2	112 M	IE3	945	22.2	84.3	86.1	85.8	0.74	4.95	6	2.7	3.4	53	65	1LE0323-1BC2	■ - ■■■■■■	39	0.01451
3	132 S	IE3	965	29.7	85.6	86.6	86	0.75	6.7	6	2.7	4	57	69	1LE0323-1CC0	■ - ■■■■■■	54	0.02666
4	132 M	IE3	960	40	86.8	88.5	88.7	0.75	8.9	6	2.7	3.4	57	69	1LE0323-1CC2	■ - ■■■■■■	63	0.03045
5.5	132 M	IE3	960	54.7	88	89.2	89	0.76	11.9	6.5	2.7	4	57	69	1LE0323-1CC3	■ - ■■■■■■	71	0.04125
7.5	160 M	IE3	980	73.1	89.1	90.4	90.3	0.78	15.6	6.5	2.7	3.6	61	73	1LE0323-1DC2	■ - ■■■■■■	95	0.0703
11	160 L	IE3	980	107	90.3	90.3	89.8	0.77	23	7	2.7	3.6	61	73	1LE0323-1DC4	■ - ■■■■■■	120	0.07068

Voltages

50 Hz 230 VΔ/400 VY

50 Hz 400 VΔ/690 VY

Voltage code 2-2 is available only for Frame size 80 to 200;

For other voltages and more information, see Innomotics Configurator.

Types of construction

Without flange IM B3
 With flange IM B5
 With flange IM B14

Version

Standard
 With additional charge
 With additional charge

For other types of construction and more information, see Innomotics Configurator.

Motor protection

Without
 3 PTC thermistors - for tripping

Version

Standard
 With additional charge

For other motor protection and more information, see Innomotics Configurator.

Terminal box position

Terminal box top

Version

Standard

For other terminal box position and more information, see Innomotics Configurator.

Order code			
2	-	2	...
3	-	4	...
Order code			
A	F	K	-
Order code			
A	B	4	-
Order code			

Selection and ordering data

P _{rated} , 50 Hz kW	Frame size	IE class	Operating values at rated power												Cast-iron series 1LE0043		m _M B3	J
			η _{rated} 50 Hz	T _{rated} 50 Hz	η _{rated} 50 Hz,	η _{rated} 50 Hz,	η _{rated} 50 Hz,	cosφ _{rated} 50 Hz,	I _{rated} 50 Hz,	Starting current	Starting torque	Break down torque	L _p fA, 50 Hz	L _{WA} , 50 Hz				
			rpm	Nm	%	%	%	4/4	A				dB(A)	dB(A)	kg	kgm ²		
Cooling: Self-ventilated (IC 411)																		
Efficiency according to IEC 60034-30-1: IE3 Premium Efficiency																		
Insulation: Thermal class 155 (temperature class F), IP55 degree of protection, utilization in accordance with thermal class 130 (temperature class B)																		
2-pole: 3000 rpm at 50 Hz																		
0.75	80 M	IE3	2835	2.5	80.7	82.9	82.9	0.86	1.56	6	2.6	3	51	62	1LE0043-0DA2		16	0.00103
1.1	80 M	IE3	2850	3.7	82.7	84	83.9	0.83	2.30	6.5	2.6	3.4	51	62	1LE0043-0DA3		17.5	0.00129
1.5	90 S	IE3	2870	5	84.2	84.8	82.3	0.86	3.00	7	2	3	55	67	1LE0043-0EA0		23	0.00229
2.2	90 L	IE3	2890	7.3	85.9	87.2	86.5	0.88	4.20	7.5	2.8	3.6	55	67	1LE0043-0EA4		27	0.00305
3	100 L	IE3	2865	10	87.1	88.3	88.3	0.87	5.7	8	3.7	3.6	62	74	1LE0043-1AA4		37	0.00446
4	112 M	IE3	2915	13.1	88.1	89.6	89.8	0.9	7.3	7.8	2.6	3.6	65	77	1LE0043-1BA2		45	0.0085
5.5	132 S	IE3	2930	17.9	89.2	90.2	90.3	0.89	10.0	7.5	2.3	3.6	67	79	1LE0043-1CA0		59	0.0175
7.5	132 S	IE3	2930	24.4	90.1	91.5	92.2	0.9	13.3	7.5	2.3	3.6	67	79	1LE0043-1CA1		67	0.022
11	160 M	IE3	2935	35.8	91.2	92	91.7	0.89	19.6	7.5	2.3	3.4	69	81	1LE0043-1DA2		97	0.0369
15	160 M	IE3	2935	48.8	91.9	92.6	92.5	0.89	26.5	7.5	2.4	3.4	69	81	1LE0043-1DA3		108	0.0451
18.5	160 L	IE3	2935	60.2	92.4	93	92.9	0.89	32.5	7.8	2.4	3.4	69	81	1LE0043-1DA4		123	0.0542
22	180 M	IE3	2950	71.2	92.7	93	92.4	0.89	38.5	7.8	2.4	3.4	70	83	1LE0043-1EA2		162	0.0835
30	200 L	IE3	2955	97	93.3	93.4	92.4	0.89	52	7.8	2.4	3.4	71	84	1LE0043-2AA4		219	0.146
37	200 L	IE3	2960	119	93.7	93.9	93.3	0.89	64	8.5	2.8	3.4	71	84	1LE0043-2AA5		248	0.181
45	225 M	IE3	2965	145	94	94.3	93.8	0.89	78	7.8	2.4	3.2	72	85	1LE0043-2BA2		322	0.301
55	250 M	IE3	2975	177	94.3	94.1	93.1	0.89	95	7.8	2.4	3.2	75	89	1LE0043-2CA2		373	0.509
4-pole: 1500 rpm at 50 Hz																		
0.55	80 M	IE3	1445	3.6	80.8	81.8	80.2	0.76	1.29	5.5	2.2	3.2	45	56	1LE0043-0DB2		17	0.00207
0.75	80 M	IE3	1440	5	82.5	82.9	80.7	0.75	1.75	6	2.6	3.7	45	56	1LE0043-0DB3		18	0.00242
1.1	90 S	IE3	1445	7.3	84.1	85.1	83.9	0.79	2.40	6.5	2.7	3.7	47	59	1LE0043-0EB0		23	0.00377
1.5	90 L	IE3	1445	9.9	85.3	86	85.2	0.79	3.20	6.5	2.8	3.8	47	59	1LE0043-0EB4		27	0.00484
2.2	100 L	IE3	1445	14.5	86.7	87.1	85.7	0.81	4.50	8.3	3.4	4.6	52	64	1LE0043-1AB4		40	0.0103
3	100 L	IE3	1440	19.9	87.7	88.1	87.1	0.81	6.1	8.3	3.7	4.6	52	64	1LE0043-1AB5		44	0.01273
4	112 M	IE3	1450	26.3	88.6	89.6	89.2	0.81	8.0	7.8	3.7	4.6	53	65	1LE0043-1BB2		49	0.0144
5.5	132 S	IE3	1455	36.1	89.6	90.9	91.1	0.84	10.5	7.8	2.6	3.8	59	71	1LE0043-1CB0		66	0.0276
7.5	132 M	IE3	1455	49.2	90.4	91.7	93.2	0.85	14.1	7.8	2.6	3.8	59	71	1LE0043-1CB2		78	0.0345
11	160 M	IE3	1465	72	91.4	92.4	92.6	0.86	20.0	7.8	2.4	3.8	61	73	1LE0043-1DB2		105	0.0626
15	160 L	IE3	1465	97.8	92.1	92.9	93	0.86	27.5	8.2	2.6	3.8	61	73	1LE0043-1DB4		122	0.0782
18.5	180 M	IE3	1470	120	92.6	93	92.5	0.83	34.5	7.8	2.6	3.6	63	76	1LE0043-1EB2		162	0.1339
22	180 L	IE3	1470	143	93	93.7	93.6	0.83	41	7.8	2.6	3.6	63	76	1LE0043-1EB4		178	0.1531
30	200 L	IE3	1475	194	93.6	94.3	94.2	0.84	55	7.8	2.6	3.6	63	76	1LE0043-2AB4		234	0.245
37	225 S	IE3	1482	238	93.9	94.1	93.4	0.85	67	8.3	3	3.6	65	78	1LE0043-2BB0		294	0.515
45	225 M	IE3	1482	290	94.2	94.2	93.7	0.85	81	8.3	3.3	3.6	65	78	1LE0043-2BB2		322	0.548
55	250 M	IE3	1485	354	94.6	95	94.7	0.86	98	7.6	2.6	3.3	66	79	1LE0043-2CB2		409	0.896

Voltages		2 - 2	3 - 4	Order code
50 Hz 230 VΔ/400 VY				
50 Hz 400 VΔ/690 VY				
Voltage code 2-2 is available only for Frame size 80 to 200				
For other voltages and more information, see Innomotics Configurator.				
Types of construction		Version		Order code
Without flange	IM B3	Standard		-
With flange	IM B5	With additional charge		
With flange	IM B14	With additional charge		
For other types of construction and more information, see Innomotics Configurator.				
Motor protection		Version		Order code
Without		Standard		-
3 PTC thermistors - for tripping		With additional charge		
For other motor protection and more information, see Innomotics Configurator.				
Terminal box position		Version		Order code
Terminal box top		Standard		4
For other terminal box position and more information, see Innomotics Configurator.				

Innomotics FL standard motors

IE3

Cast-iron series Innomotics FL 1LE0043 – self-ventilated

Selection and ordering data

P _{rated} , 50 Hz/ P50 kW	Frame size FS	IE class	Operating values at rated power										L _{pfA} , 50 Hz dB(A)	L _{WA} , 50 Hz dB(A)	Cast-iron series 1LE0043 Article No.	m _M B3	J
			η _{rated} 50 Hz	T _{rated} 50 Hz	η _{rated} 50 Hz, 4/4	η _{rated} 50 Hz, 3/4	η _{rated} 50 Hz, 2/4	cosφ _{rated} 50 Hz, 4/4	I _{rated} 50 Hz, 400 V	Starting current	Starting torque	Break down torque					
			rpm	Nm	%	%	%		A								
Cooling: Self-ventilated (IC 411)																	
Efficiency according to IEC 60034-30-1: IE3 Premium Efficiency																	
Insulation: Thermal class 155 (temperature class F), IP55 degree of protection, utilization in accordance with thermal class 130 (temperature class B)																	
6-pole: 1000 rpm at 50 Hz																	
0.55	80 M	IE3	940	5.6	77.2	77.5	74.6	0.67	1.53	5	2.7	3.4	44	55	1LE0043-0DC3	19	0.00298
0.75	90 S	IE3	940	7.6	78.9	80.3	78	0.7	1.96	5	2.4	3.2	45	57	1LE0043-0EOC	24	0.00422
1.1	90 L	IE3	945	11.1	81	81.6	80.4	0.69	2.85	5.5	2.7	3.5	45	57	1LE0043-0EC4	27	0.00497
1.5	100 L	IE3	950	15.1	82.5	84.1	82.9	0.74	3.55	5.5	2.5	3.5	49	61	1LE0043-1AC4	41	0.01107
2.2	112 M	IE3	945	22.2	84.3	86.1	85.4	0.74	4.95	6	2.7	3.4	53	65	1LE0043-1BC2	48	0.01414
3	132 S	IE3	965	29.7	85.6	86.6	86	0.75	6.7	6	2.7	4	57	69	1LE0043-1CC0	59	0.02333
4	132 M	IE3	960	40	86.8	88.5	88.7	0.75	8.9	6	2.7	3.4	57	69	1LE0043-1CC2	70	0.0297
5.5	132 M	IE3	960	54.7	88	89.2	89	0.76	11.9	6.5	2.7	4	57	69	1LE0043-1CC3	84	0.0402
7.5	160 M	IE3	980	73.1	89.1	90.4	90.3	0.78	15.6	6.5	2.7	3.6	61	73	1LE0043-1DC2	105	0.1197
11	160 L	IE3	980	107	90.3	90.3	89.8	0.77	23	7	2.7	3.6	61	73	1LE0043-1DC4	129	0.1605
15	180 L	IE3	975	147	91.2	92.1	91.8	0.8	29.5	7	2.3	3	59	73	1LE0043-1EC4	163	0.2008
18.5	200 L	IE3	978	181	91.7	92.5	92.2	0.8	36.5	7	2.3	3	59	73	1LE0043-2AC4	212	0.312
22	200 L	IE3	980	214	92.2	93.1	93	0.8	43	7	2.6	3	59	73	1LE0043-2AC5	229	0.356
30	225 M	IE3	982	292	92.9	93.9	94.3	0.84	55	7.6	2.6	3	60	74	1LE0043-2BC2	321	0.74
37	250 M	IE3	985	359	93.3	94.1	94.1	0.84	68	7.8	2.6	3	62	76	1LE0043-2CC2	395	1.26
45	280 S	IE3	988	435	93.7	94.5	94.4	0.84	83	7.8	3	3	64	78	1LE0043-2DC0	494	1.45
55	280 M	IE3	988	532	94.1	94.6	94.5	0.84	100	7.8	3	3	64	78	1LE0043-2DC2	555	1.77

Voltages

50 Hz 230 VΔ/400 VY

50 Hz 400 VΔ/690 VY

Voltage code 2-2 is available only for Frame size 80 to 200

For other voltages and more information, see Innomotics Configurator.

Types of construction

Without flange IM B3
 With flange IM B5
 With flange IM B14

Version

Standard
 With additional charge
 With additional charge

For other types of construction and more information, see Innomotics Configurator.

Motor protection

Without
 3 PTC thermistors - for tripping

Version

Standard
 With additional charge

For other motor protection and more information, see Innomotics Configurator.

Terminal box position

Terminal box top

Version

Standard

For other terminal box position and more information, see Innomotics Configurator.

2 - 2	3 - 4	A	F	K	B	4	4
Order code							-
Order code							-
Order code							-

Innomotics FL standard motors

Aluminum series Innomotics FL 1LE0323 and cast-iron series Innomotics FL 1LE0043 and 1LE8044

Selection and ordering data

Voltages	Article No. supplement		Frame size													Motor version			
	Voltage code 12th and 13th position of the Article No.	Additional identifica- tion code with order code and plain text if required	80	90	100	112	132	160	180	200	225	250	280	315	355	IEC	IE3		
			1LE0323																
			1LE0043																
													1LE8044			IE4			
Order code																			
1LE0 ... - ■ - ■ ...																			
Voltage at 50 Hz																			
50 Hz 220 VΔ/380 VY	2	1	-	○	○	○	○	○	○	○	-	-	-	-	-				
50 Hz 230 VΔ/400 VY	2	2	-	□	□	□	□	□	□	□	-	-	-	-	-				
50 Hz 400 VΔ/690 VY	3	4	-	□	□	□	□	□	□	□	□	□	□	□	□				
50 Hz 380 VΔ/660 VY	3	3	-	○	○	○	○	○	○	○	○	○	○	○	○				
50 Hz 240 VΔ/415 VY	2	3	-	✓	✓	✓	✓	○	○	○	-	-	-	-	-				
50 Hz 415 VΔ	3	5	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				

- ☐ Standard version
☐ Without additional charge
☒ With additional charge
 - Not possible

Innomotics FL standard motors

Aluminum series Innomotics FL 1LE0323 and cast-iron series Innomotics FL 1LE0043 and 1LE8044

Selection and ordering data

Types of construction	Article No. supplement	Type of construction code letter	For types of construction with order code(s)	Frame size											Motor version			
				80	90	100	112	132	160	180	200	225	250	280	315	355	IEC	IE3
				1LE0323											1LE8044			
				1LE0043														
											1LE8044		IE4					
1LE0...-....	...(-Z)	Order code																
Without flange																		
IM B3		A	-															
IM B6		T	-															
IM B7		U	-															
IM B8		V	-															
IM V6		D	-															
IM V5 without protective cover		C	-															
With flange		EN 50347 DIN 42948		FF165 A 200	FF165 A 200	FF215 A 250	FF215 A 250	FF265 A 300	FF300 A 350	FF300 A 350	FF350 A 400	FF400 A 450						
IM B5		F	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-		
IM V1 without protective cover		G	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
IM V3		H	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-		
IM B35		J	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
IM V15		W	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
IM V35		Y	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		

Innomotics FL standard motors**Aluminum series Innomotics FL 1LE0323 and cast-iron series Innomotics FL 1LE0043 and 1LE8044**

Types of construction	Article No. supplement		Frame size											Motor version			
	Type of construction code letter	For types of construction with order code(s) Article No. with additional identification code -Z Order code	80	90	100	112	132	160	180	200	225	250	280	315	355	IEC	IE3
			1LE0323											1LE8044			
			1LE0043														
1LE0 ... -	... (-Z)														IE4		
With flange		EN 50347 DIN 42948	FT100 C 120	FT115 C 140	FT130 C 160	FT130 C 160	FT165 C 200	FT215 C 250	-	-	-	-	-	-	-		
IM B14		K	-	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-		
IM V19		L	-	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-		
IM V18 without protective cover		M	-	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-		
IM B34		N	-	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-		

☐ Standard version
☒ With additional charge
☐ Not possible

Innomotics FL standard motors

Aluminum series Innomotics FL 1LE0323 and cast-iron series Innomotics FL 1LE0043 and 1LE8044

Selection and ordering data

Motor protection	Article No. supplement		Frame size												Motor version		
	Motor protection code letter 15th position of the Article No.	Additional identification code with order code and plain text if required	80	90	100	112	132	160	180	200	225	250	280	315	355	IEC	IE3
1LE0...-....	.	Order code	1LE0323												IEC		IE3
			1LE0043														
			1LE8044														IE4

Motor protection																	
Without (standard)	A	-	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
3 PTC thermistors – for tripping (2 terminals)	B	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
2 or 6 PTC thermistors – for alarm and tripping (4 terminals)	C	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
3 Pt100 resistance thermometers (6 terminals)	H	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
6 Pt100 resistance thermometers (12 terminals)	J	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
1 Pt1000 resistance thermometers (2 terminals)	K	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

- ☐ Standard version
☒ With additional charge

Terminal box position	Article No. supplement		Frame size												Motor version		
	Terminal box position code 16th position of the Article No.	Additional identification code with order code and plain text if required	80	90	100	112	132	160	180	200	225	250	280	315	355		
			1LE0323												IEC	IE3	
			1LE0043													IE4	
				1LE8044													
1LE0...-....		Order code															

Terminal box position																	
Terminal box top	4	-	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
Terminal box right-hand side	5	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Terminal box left-hand side	6	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

- ☐ Standard version

Innomotics FL standard motors

Aluminum series Innomotics FL 1LE0323 and cast-iron series Innomotics FL 1LE0043 and 1LE8044

Selection and ordering data

Special versions	Additional identification code -Z with order code and plain text if required	Frame size													Motor version	
		80	90	100	112	132	160	180	200	225	250	280	315	355	IEC	IE3
		1LE0323														
		1LE0043														
1LE0 ... - ... -Z	Order code														IE4	
Motor protection																
2 Pt100 resistance thermometers for bearings (4 terminals)	Q72	-	-	-	-	-	-	✓	✓	✓	✓	✓	✓	✓		
Motor connection and terminal box																
External grounding	H04	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Terminal box on NDE	H08	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Additional connection box	L97	-	-	-	-	-	-	-	✓	✓	✓	✓	✓	✓		
Terminal box rotated by 90°, entry from DE	R10	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Terminal box rotated by 90°, entry from NDE	R11	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Terminal box rotated by 180°	R12	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Windings and insulation																
Temperature class 155 (F), utilized acc. to 155 (F), with service factor (SF)	N01	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Temperature class 180 (H)	N10	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Colors and paint finish																
Unpainted, only primed ²⁾	S01	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Standard finish RAL 7032	S80	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Standard finish RAL 9006	S81	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Design for TH W, F1; WF1 and sea air resistant	W88	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Modular technology – Basic versions																
Mounting of separately driven fan	F70	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Special technology																
Mounting of rotary pulse encoder LL 861 900 220, 1024 l	G04	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Prepared for LL861900220 encoder	X05	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Mechanical version and degrees of protection																
Canopy (for vertical mountings)	H00	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Condensation drain holes	H03	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Degree of protection IP56	H22	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Prepared for mountings, threaded hole only	G46	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Coolant temperature and installation altitude																
Coolant temperature -40 to +40 °C ²⁾	D03	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Versions in accordance with standards and specifications																
CCC China Compulsory Certification ⁴⁾	D01	✓	✓	-	-	-	-	-	-	-	-	-	-	-	Only for:	Voltage code 2-1 (12th and 13th position of the Article No.)
CEL China Energy Efficiency Label	D34	○	○	○	○	○	○	○	○	○	○	○	○	○		
TR CU product safety certificate EAC for Eurasian Customs Union	D47	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Bearings and lubrication																
Locating (fixed) bearing DE	L20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	
Bearing design for increased cantilever forces	L22	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Regreasing device	L23	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	□	□	□	
Insulated bearing	L27	-	-	-	-	-	-	-	-	-	✓	✓	✓	✓		
Bearing insulation NDE	L51	-	-	-	-	-	-	-	-	-	✓	✓	✓	✓		
Measuring nipple for SPM shock pulse measurement for bearing inspection	Q01	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Shaft and rotor																
Second standard shaft extension on NDE in accordance with EN 50347 ¹⁾	L05 L72	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		

Innomotics FL standard motors

Aluminum series Innomotics FL 1LE0323 and cast-iron series Innomotics FL 1LE0043 and 1LE8044

Special versions	Additional identification code -Z with order code and plain text if required	Frame size													Motor version		
		80	90	100	112	132	160	180	200	225	250	280	315	355	IEC	IE3	
		1LE0323															IE4
		1LE0043															
													1LE8044				
1LE0...-.....-Z	Order code																
Heating and ventilation																	
Metal external fan	F76	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
Without external fan and without fan cover	F90	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
Anti-condensation heating for 230 V (2 terminals)	Q02	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
Anti-condensation heating for 220 V (2 terminals)	Q04	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
Rating plate and additional rating plates																	
Additional nameplate with 60 Hz data (operation in the EEA only permitted for 50 Hz) ³⁾	B05	○	○	○	○	○	○	○	○	○	○	○	○	○			
Additional rating plate for voltage tolerance ³⁾	B07	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
Packaging, safety notes, documentation and test certificates																	
CE marking		□	□	□	□	□	□	□	□	□	□	□	□	□			
Seaworthy packaging for non-over-seas customers		□	□	□	□	□	□	□	□	□	□	□	□	□	Only for:	Combination with option code T98	
Inspection certificate 3.1 acc. to EN 10204	B02	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
Without "Made in country of origin" marking	B13	○	○	○	○	○	○	○	○	○	○	○	○	○			
Container delivery instead of warehouse delivery	T98	○	○	○	○	○	○	○	○	○	○	○	○	○	Please contact Innomotics sales for support with container order		

- Standard version
 ○ Without additional charge
 ✓ With additional charge
 – Not possible

¹⁾ L05 only for 1LE0; L72 only for 1LE8

²⁾ Not possible for 1LE0323

³⁾ Can be ordered only for 230 VΔ/400 VY or 400 VΔ/690 VY (voltage code "22" or "34")

⁴⁾ Can be ordered only for 220 VΔ/380 VY (voltage code "21")

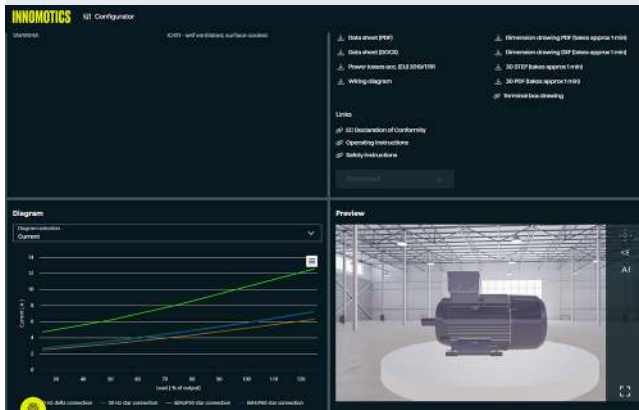
Innomotics FL standard motors

Dimension sheet generator (within the Innomotics Configurator)

Overview

A dimensional drawing can be created in the Innomotics Configurator for every configurable motor.

A dimensional drawing can be requested for every other motor.



When a complete Article No. is entered with or without order codes, a dimensional drawing can be called up under the "Documentation" tab.

These dimensional drawings can be presented in different views and sections and printed.

The corresponding dimension sheets can be exported, saved and processed further in DXF format (interchange/import format for CAD systems) or as bitmap graphics.

Online access

The Innomotics Configurator is integrated into the can be used on the Internet.

configurator.innomotics.com

IE4, Super Premium Efficiency – self-ventilated · Frame sizes 280 S to 355 M

Type of construction IM B3



For flange dimensions, see page 2/21 (Z = the number of retaining holes)

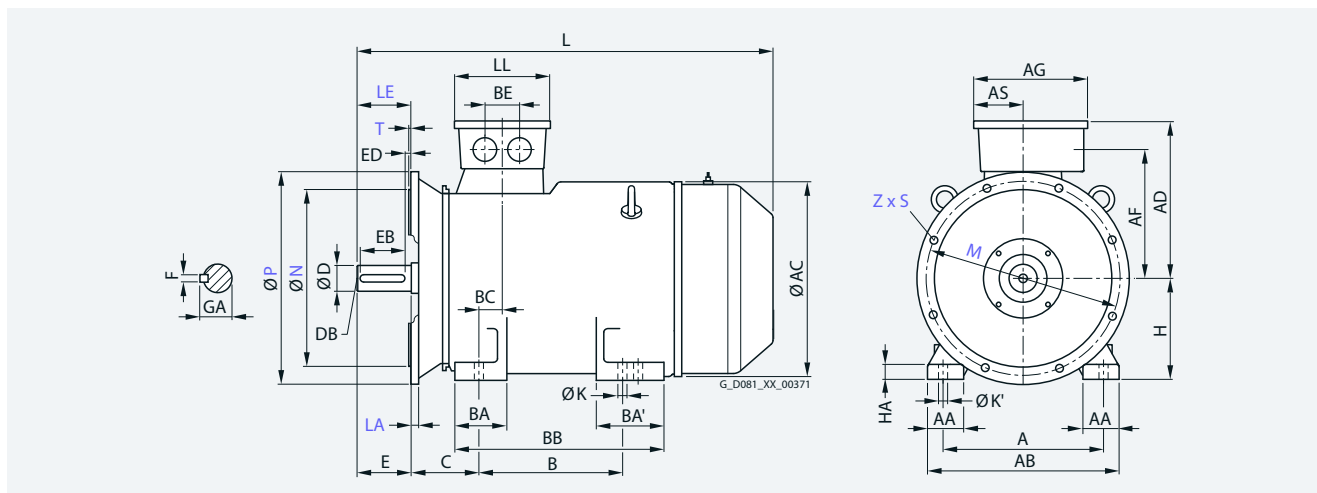
2/15 Innomotics D 81.6 | August 2026

Innomotics FL standard motors

IE4, Super Premium Efficiency – self-ventilated · Frame sizes 280 S to 355 M

Dimensional drawings**Type of construction IM B35**

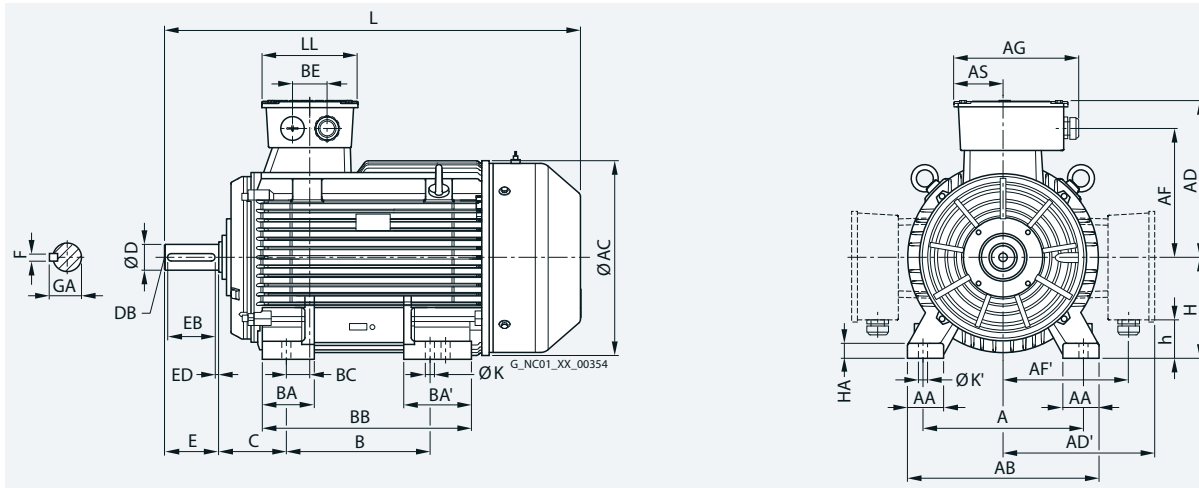
For flange dimensions, see page 2/21 (Z = the number of retaining holes)

**2**

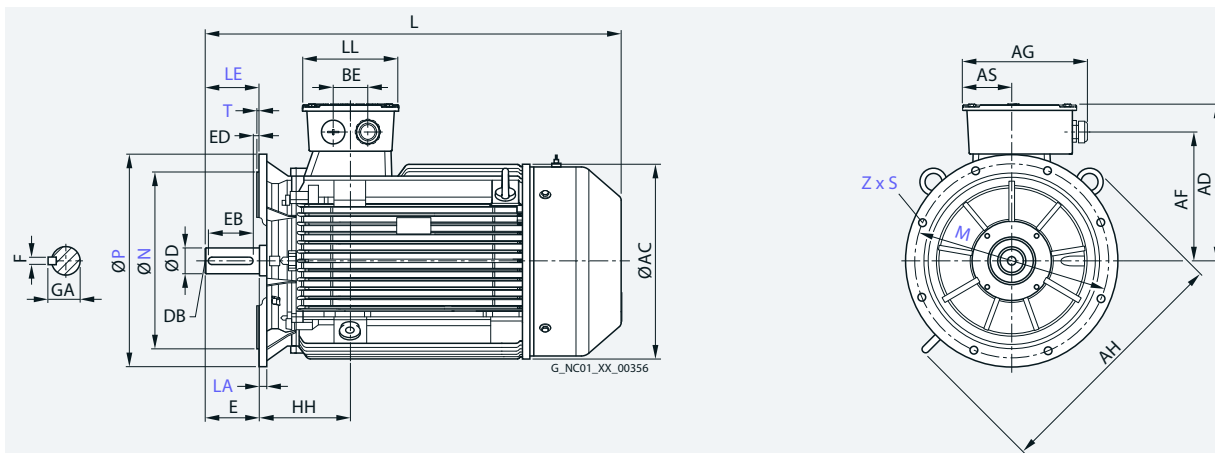
For motor			Dimension designation acc. to IEC										DE shaft extension				
Frame size	Motor type 1LE8044	No. of poles	H	HA	HH	K	K'	L	LC	LL	D	DB	E	EB	ED	F	GA
280 S/M	2DA0, 2DA2, 2DB0, 2DB2	2, 4	280	40	264	24	24	1014	1165	246	65	M20	140	125	7.5	18	-
								1069	1222		75					20	
315 S/M/L	3AA0, 3AA2, 3AB0, 3AB2, 3AC0, 3AC2, 3AA5, 3AA6, 3AA7, 3AB5, 3AB6, 3AB7, 3AC5, 3AC6	2, 4, 6	315	50	330	28	28	1160	1315	296	65	M20	140	125	10	18	-
								1190	1375		80		170	140	25	22	
								1210	1365								-
								1305	1460								
								1335	1520								
355 M/L	3BA2, 3BA3, 3BB2, 3BB4, 3BC2, 3BC3, 3BC4, 3BA5, 3BA6, 3BB5, 3BB6, 3BC5, 3BC6		355	53	322	28	28	1436	1600	347	75	M20	140	125	10	20	-
								1466	1660		95	M24	170	140	25	25	
								1516	1680		75	M20	140	125	10	20	
								1546	1740		95	M24	170	140	25	25	

Innomotics FL standard motors

IE3, Premium Efficiency – self-ventilated · Frame sizes 80 M to 160 L

Dimensional drawings**Type of construction IM B3****Types of construction IM B5 and IM V1**

For flange dimensions, see page 2/21 (Z = the number of retaining holes)



For motor			Dimension designation acc. to IEC																
Frame size	Motortype	No. of poles	A	AA	AB	AC ¹⁾	AD	AD'	AF	AF'	AG	AS	B ²⁾	BA	BA'	BB	BC	BE	C
80 M	all	2, 4, 6	125	36	160	166	142	142	110	110	117	66.5	100	44	44	135	26	42	50
90 S	OE.0		140	36	175	184	151	151	119	119	117	66.5	100	46	46	140	20	42	56
90 L	OE.4												125			165			
100 L	all		160	40	200	205	178	178	141	141	130	71	140	45	45	176	30.5	54	63
112 M	all		190	50	226	230	189	189	152	152	130	71	140	50	50	180	22	54	70
132 S	1C.0, 1C.1 1C.2, 1C.3	2, 4, 6 2	216	50	256	268	212	212	175	175	130	71	140	64	64	186	32.5	54	89
132 M	1C.2 1C.3	2, 4, 6 4, 6											178			224			
160 M	1D.2, 1D.3	2, 4, 6	254	60	314	327	249	249	208	208	175	82.5	210	70	70	258	51	64	108
160 L	1D.4												254			302			

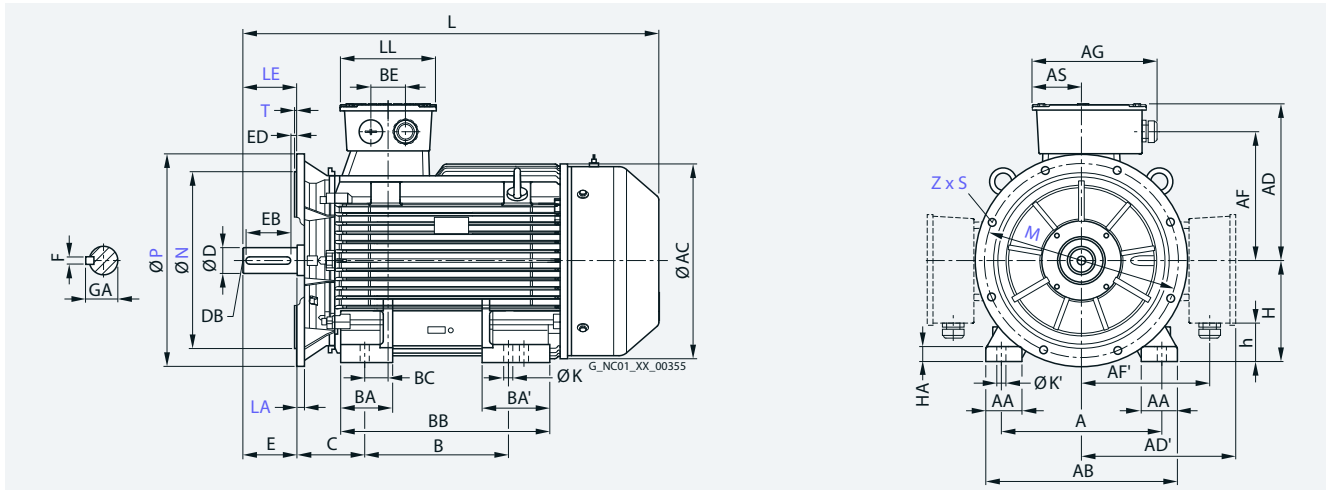
¹⁾ Measured across the bolt heads.²⁾ This dimension is assigned in DIN EN 50347 to the frame size listed.

Innomotics FL standard motors

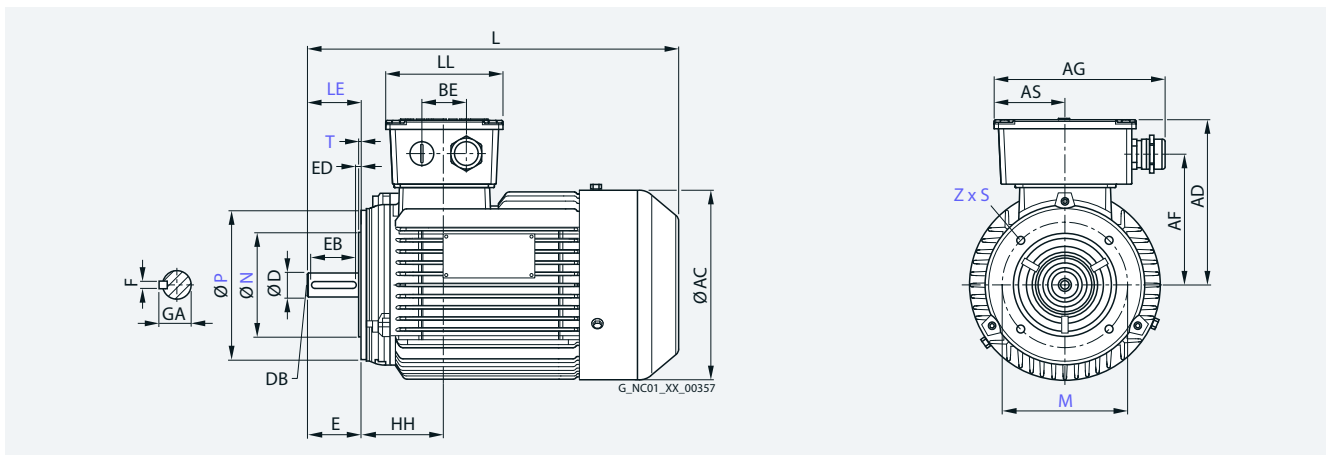
IE3, Premium Efficiency – self-ventilated · Frame sizes 80 M to 160 L

Dimensional drawings**Type of construction IM B35**

For flange dimensions, see page 2/21 (Z = the number of retaining holes)

**Type of construction IM B14**

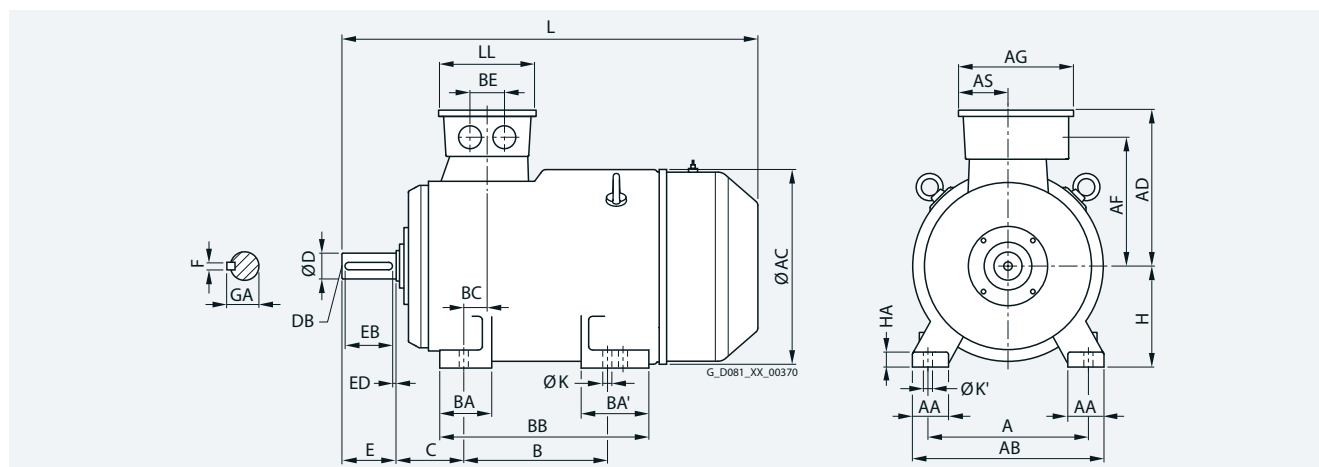
For flange dimensions, see page 2/21 (Z = the number of retaining holes)



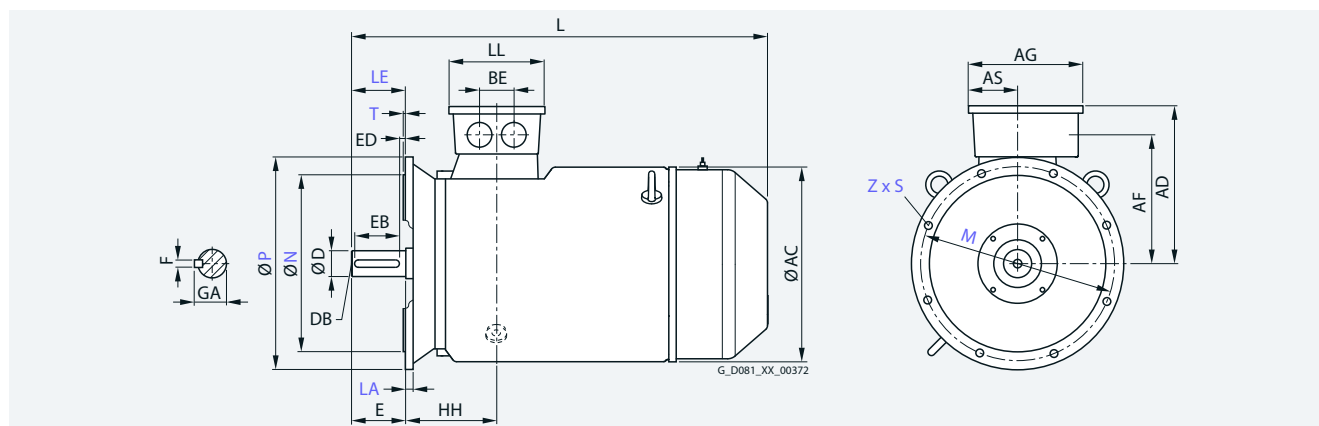
For motor			Dimension designation acc. to IEC									DE shaft extension						
Frame size	Motor type	No. of poles	H	HA	HH	K	K'	L	LC	LL	D	DB	E	EB	ED	F	GA	
80 M	all	2, 4, 6	80	10	76	10	14	328	363	111	19	M6	40	32	4	6	21.5	
90 S	OE.0		90	10	76	10	14	366	411	111	24	M8	50	40	5	8	27	
90 L	OE.4							391	436									
100 L	all		100	12	93.5	12	16	460.5	516.5	120	28	M10	60	50	5	8	31	
112 M	all		112	15	92	12	16	448	504.5	120	28	M10	60	50	5	8	31	
132 S	1C.0, 1C.1 1C.2, 1C.3	2, 4, 6 2	132	15	121.5	12	16	514.5	582	120	38	M12	80	70	5	10	41	
132 M	1C.2 1C.3	2, 4, 6 4, 6						559.5	627									
160 M	1D.2, 1D.3	2, 4, 6	160	20	159	15	19	614	701	165	42	M16	110	100	5	12	45	
160 L	1D.4							674	761									

Innomotics FL standard motors

IE3, Premium Efficiency – self-ventilated · Frame sizes 80 M to 280 M

Dimensional drawings**Type of construction IM B3****Types of construction IM B5 and IM V1**

For flange dimensions, see page 2/21 (Z = the number of retaining holes)

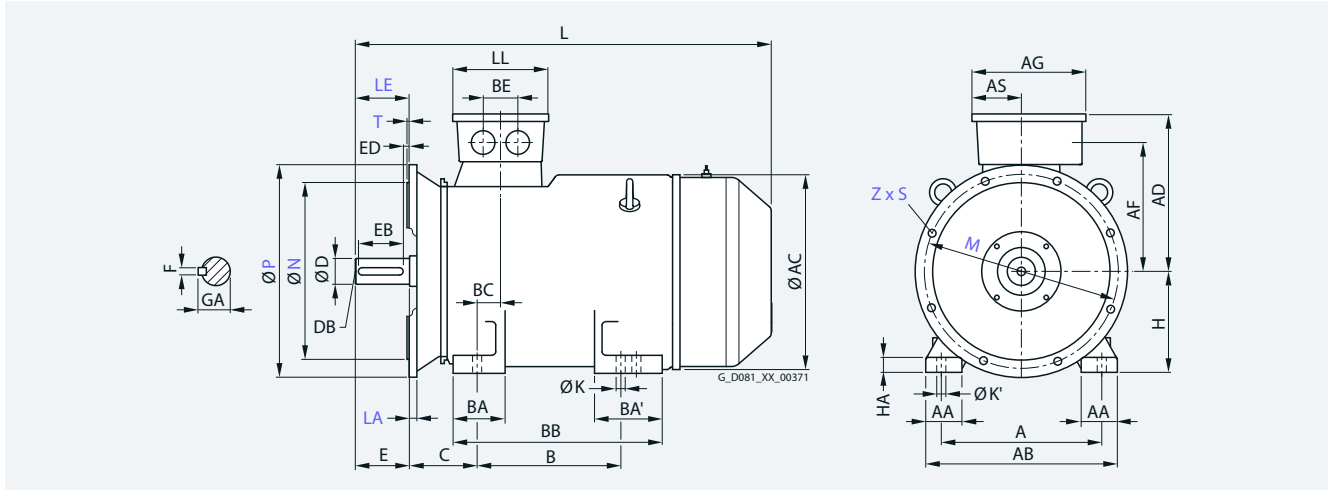


For motor			Dimension designation acc. to IEC														
Frame size	Motor type	No. of poles	A	AA	AB	AC ¹⁾	AD	AF	AG	AS	B ²⁾	BA	BA'	BB	BC	BE	C
80 M	all	2, 4, 6	125	36	160	166	143	111	117	66.5	100	44	44	135	26	42	50
90 S	0E.0		140	36	175	184	151	119	117	66.5	100	46	46	140	20	42	56
90 L	0E.4										125			165			
100 L	all		160	40	200	205	178	141	130	71	140	45	45	176	30.5	54	63
112 M	all		190	50	226	230	189	152	130	71	140	50	50	180	22	54	70
132 S	1C.0, 1C.1		216	50	256	268	212	175	130	71	140	64	64	186	32.5	54	89
132 M	1C.2, 1C.3	4, 6									178			224			
160 M	1D.2, 1D.3	2, 4, 6	254	60	314	324	244	194	185	92	210	70	70	258	51	68	108
160 L	1D.4										254			302			
180 M	1E.2	2, 4	279	65	339	368	261	211	185	92	241	80	80	301	37	68	121
180 L	1E.4	4, 6									279			339			121
200 L	all	2, 4, 6	318	70	378	410	308	247.5	241	103	305	80	80	369	70	85	133
225 S	2BB0	4	356	80	436	449	336	275.5	241	103	286	90	90	373	63	85	149
225 M	2BA2	2									311			348			149
	2B.2	4, 6															
250 M	all	2, 4, 6	406	90	490	503	378	313.5	292	118	349	100	100	421	92	84	168
280 S	2D.0	6	457	100	540	540	418	353.5	292	118	368	138	138	454	72	84	190
280 M	2D.2										419			505			

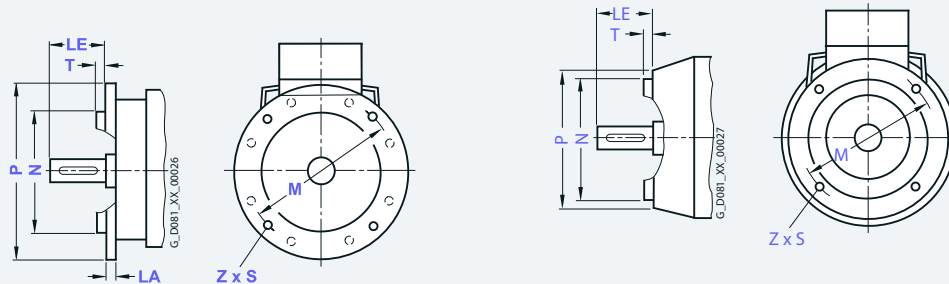
¹⁾ Measured across the bolt heads.²⁾ This dimension is assigned in DIN EN 50347 to the frame size listed.

Dimensional drawings**Type of construction IM B35**

For flange dimensions, see page 2/21 (Z = the number of retaining holes)



For motor			Dimension designation acc. to IEC								DE shaft extension						
Frame size	Motor type 1LE0043	No. of poles	H	HA	HH	K	K'	L	LC	LL	D	DB	E	EB	ED	F	GA
80 M	all	2, 4, 6	80	10	76	10	10	328	363	111	19	M6	40	32	4	6	21.5
90 S	0E.0		90	10	76	10	10	366	411	111	24	M8	50	40	5	8	27
90 L	0E.4							391	436								
100 L	all		100	12	93.5	12	12	460.5	516.5	120	28	M10	60	50	5	8	31
112 M	all	4, 6	112	15	92	12	12	448	504.5	120	28	M10	60	50	5	8	31
132 S	1C.0, 1C.1		132	15	121.5	12	12	504.5	582	120	38	M12	80	70	5	10	41
132 M	1C.2, 1C.3							559.5	627								
160 M	1D.2, 1D.3		2, 4, 6	160	20	159	15	15	614	701	155	42	M16	110	100	5	12
160 L	1D.4							654	761								
180 M	1E.2	2, 4	180	22	158	15	15	695	836	155	48	M16	110	100	5	14	51.5
180 L	1E.4	4, 6						721	876								
200 L	all	2, 4, 6	200	25	203	19	19	790	927	213	55	M20	110	100	5	16	59
225 S	2BA2	2	225	34	212	19	19	850	965	213	55	M20	110	100	5	16	59
225 M	2BB0	4						823									
	2B.2	4, 6						880	940								
250 M	all	2, 4, 6	250	40	260	24	24	915	1112	246	60	M20	140	125	10	18	64
280 S	2D.0	6	280	40	262	24	24	980	1165	246	75	M20	140	125	10	20	79.5
280 M	2D.2							1031									

Innomotics FL standard motors**Flange dimensions****Dimensional drawings**

Frame size	Type of construction	Flange type	Flange with through holes (FF/A) Flange with tapped holes (FT/C)		Dimension designation acc. to IEC							
			Acc. to EN 50347	Acc. to DIN 42948	LA ¹⁾	LE	M	N	P	S	T	Z
80	IM B5, IM B35, IM V1	Flange	FF165	A 200	10	40	165	130	200	12	3,5	4
	IM B14, IM B34	Flange	FT100	C 120	–	40	100	80	120	M6	3	4
90	IM B5, IM B35, IM V1	Flange	FF165	A 200	10	50	165	130	200	12	3,5	4
	IM B14, IM B34	Flange	FT115	C 140	–	50	115	95	140	M8	3	4
100	IM B5, IM B35, IM V1	Flange	FF215	A 250	11	60	215	180	250	14,5	4	4
	IM B14, IM B34	Flange	FT130	C 160	–	60	130	110	160	M8	3,5	4
112	IM B5, IM B35, IM V1	Flange	FF215	A 250	11	60	215	180	250	14,5	4	4
	IM B14, IM B34	Flange	FT130	C 160	–	60	130	110	160	M8	3,5	4
132	IM B5, IM B35, IM V1	Flange	FF265	A 300	13	80	265	230	300	14,5	4	4
	IM B14, IM B34	Flange	FT165	C 200	–	80	165	130	200	M10	3,5	4
160	IM B5, IM B35, IM V1	Flange	FF300	A 350	14	110	300	250	350	18,5	5	4
	IM B14, IM B34	Flange	FT215	C 250	–	110	215	180	250	M12	4	4
180	IM B5, IM B35, IM V1	Flange	FF300	A 350	13	110	300	250	350	18,5	5	4
200	IM B5, IM B35, IM V1	Flange	FF350	A 400	15	110	350	300	400	18,5	5	4
225	IM B5, IM B35, IM V1	Flange	FF400	A 450	16	110/140 ²⁾	400	350	450	18,5	5	8
250	IM B5, IM B35, IM V1	Flange	FF500	A 550	18	140	500	450	550	18.5	5	8
280	IM B5, IM B35, IM V1	Flange	FF500	A 550	18	140	500	450	550	18.5	5	8
315	IM B5, IM B35, IM V1	Flange	FF600	A 660	22	140/170	600	550	660	24	6	8
355	IM B35, IM V1	Flange	FF740	A 800	25	140/170	740	680	800	24	6	8

¹⁾ Flange LA size refer to the thickness at the flange mounting hole.²⁾ Dimension 140 valid for 4- and 6-pole motors.

INNOMOTICS

Published by
Innomotics GmbH

Innomotics GmbH
Vogelweiherstr. 1-15
90441 Nuremberg
Germany

innomotics.com/low-voltage-motors

PDF INLVM-C00002-03-7600
Produced in Germany
© Innomotics 2026

Subject to changes and errors. The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.

All product designations may be trademarks or product names of Innomotics GmbH or other companies whose use by third parties for their own purposes could violate the rights of the owners.

Security information

Innomotics provides products and solutions with industrial security functions that support the secure operation of plants, systems, machines and networks. In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial security concept. Innomotics' products and solutions constitute one element of such a concept. Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place. For additional information on industrial security measures that may be implemented, please visit

www.innomotics.com/cybersecurity

Innomotics' products and solutions undergo continuous development to make them more secure. Innomotics strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats.



Get more
information

For more information please contact your distributor: